

G2228P-24-410W

26GE+2SFP Cloud Managed PoE Switch

G2228P-24-410W

26GE+2SFP Cloud Managed PoE Switch

Descriptions



G2228P-24-410W is a 28-port PoE switch supporting IP-COM ProFi web and app management. Compatible with 802.3af/at standards, this switch provides up to 30W per port and up to 410W as a whole. It also supports detection of loops and unauthorized access, and 24/7 watchdog, making it an ideal choice for adding PD devices such as APs, cameras, and IP phones to your network and reducing time and costs on maintenance.

Features

- Comply with IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3af, IEEE802.3at, IEEE802.3x, IEEE802.3z, IEEE802.1p, IEEE802.1q standards
- 26 10/100/1000 Base-T Ethernet ports, 2 1000 Base-X SFP optical ports
- 8 K MAC address table and MAC address auto learning
- 24 PoE ports, single port output power 30W, Total power budget 370W
- 56Gbps non-blocking wire-speed forwarding
- Web platform remote management, mobile APP management
- 4M large cache
- Support QVLAN, DHCP Snooping, anti-loop, PoE timing, watchdog, etc

USPs



Cloud management platform

It supports engineering Baoyun Web platform and mobile APP management. You can scan the QR code in batches through the APP to add switches, automatically configure and go online. The cloud platform automatically generates a visual network topology, and you can check the operating status of the equipment anytime and anywhere.



PoE timing

Supports setting port PoE to turn on or off at fixed times to save energy during idle periods



Flexible installation


Supports desktop, wall-mounted, rack and other installation methods



Rich management features

Provides management functions such as QVLAN, VLAN transparent transmission, traffic statistics, port loop prevention, MAC address binding, etc., suitable for a variety of network scenarios

Typical Scenario

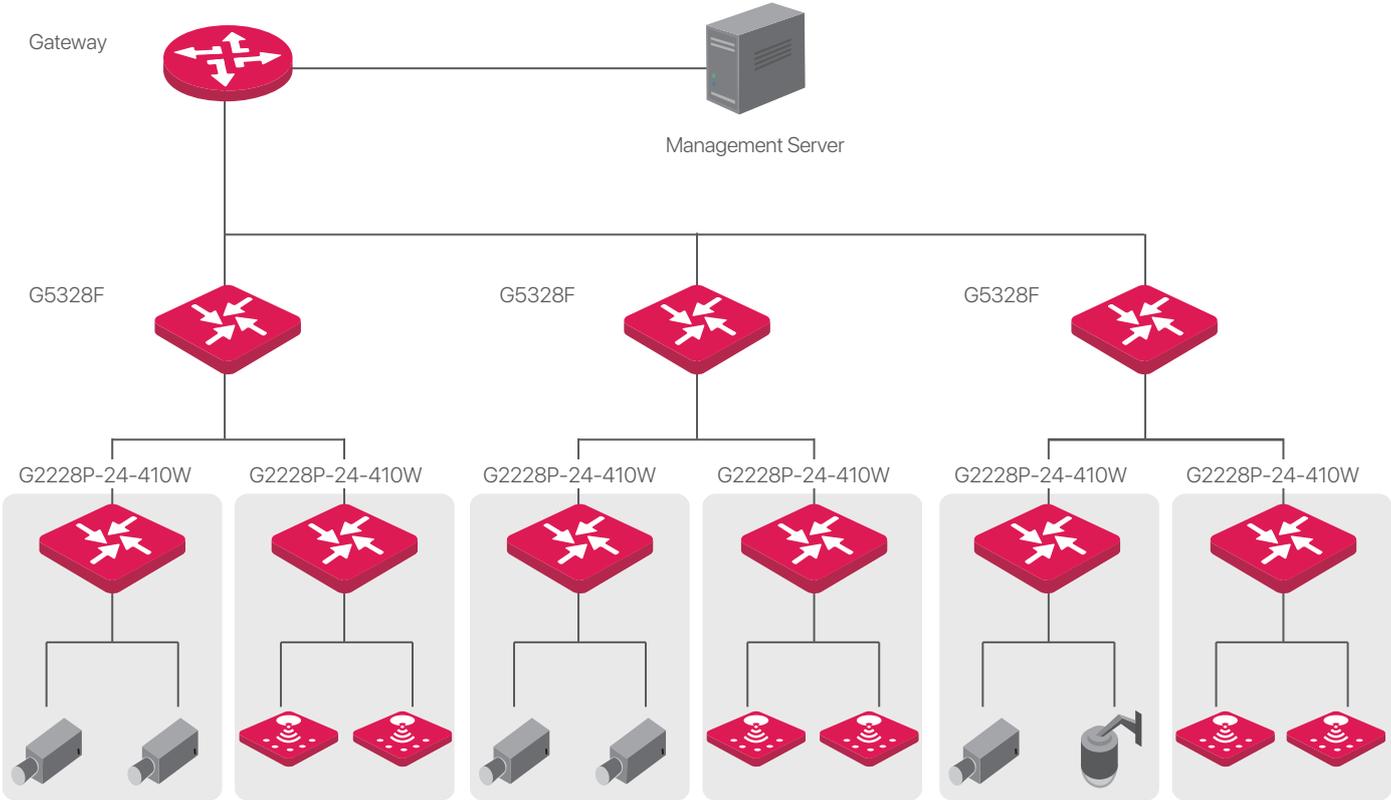

Specifications

| Hardware specifications | |
|-------------------------|---|
| Network standards | IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3af, IEEE802.3at, IEEE802.3x, IEEE802.3z, IEEE802.1p, IEEE802.1q |
| MTBF | ≥50,000hours |
| LED indicators | One Link/Act LED indicator for each port One PWR LED indicator for each device One SYS LED indicator for each device One PoE-MAX LED indicator for each device |
| Ports | 24*10/100/1000 Base-T Ethernet Ports (Data&power) 2*10/100/1000 Base-T Ethernet Ports (Data) 2*1000 Base-X SFP optical ports |
| Lightning Protection | ≥6KV |
| Switching Mode | Store-and-forward |
| Switching Capacity | 56Gbps |
| Forwarding Rate | 41.7Mpps |
| MAC Address Table | 8K |
| Input Voltage | AC: 100-240V 50/60Hz |
| PoE Power Supply | 1-24 ports support 802.3af/at standard PoE power supply 1, 2 is +, 3, 6 is - |
| Dimensions (L × W × H) | 440*240*44mm |
| Power Consumption | Total power consumption:<410W Total power budget:370W |
| Environment | Operating temperature: 0°C - 45°C Storage temperature: -40°C - 70°C Operating humidity: (10% - 90%)RH, non-condensing Storage humidity: (5% - 90%)RH, non-condensing |
| Certification | CE、FCC、RoHS |

Specifications

| Software specifications | |
|----------------------------|--|
| VLAN | Support VLAN transparent transmission Support IEEE802.1Q VLAN |
| port | Support port flow control Support port isolation Support port mirroring and aggregation Support port traffic statistics |
| speed limit | Support port entrance and exit speed limit |
| Anti-ring | Support switch port loop protection |
| QoS | Support strict priority Supports weighted priority |
| MAC | Support MAC address table viewing MAC whitelist binding |
| Storm control | Support port storm control |
| Loading and Upgrading | Support HTTP upgrade Support configuration import and export |
| IGMP | Supports IGMP fast leave Supports IGMP Report Suppression |
| DHCP | Support DHCP Client Support DHCP Snooping |
| PoE | Support PoE power display Support PoE on and off Support PoE timing |
| watchdog | 7*24 hours automatic operation and maintenance |
| Management and Maintenance | Support ProFi App management Support ProFi Cloud web UI management Support local web UI management Support ping test |

IP-COM
World Wide Wireless

IP-COM NETWORKS CO., LTD.

Tower E3, No.1001, Zhongshanyuan Road,
Nanshan District, Shenzhen, China. 518052

Service: info@ip-com.com.cn

Inquiry: marketing@ip-com.com.cn

Tel: +86-755-27653089

Specifications are subject to change without notice. Copyright ©2024 IP-COM Networks Co., Ltd. All Rights Reserved. IP-COM is the trademark of IP-COM Networks Co., Ltd. All other brand names mentioned herein are the trademark or registered trademarks of their respective holders.