




Front View



Optional item - Front door

Features

- Tool-less design supports quick installation and easy maintenance:
 - Tool-less 3.5" & 2.5" drive trays
 - Tool-less top covers
 - Tool-less backplane
 - Tool-less slide rails
- 12Gb/s SAS expander chip on backplane
- Specially designed hot swap and low power consumption fans minimize rotational vibration and provide superior cooling
- 3.5" drive tray comes with 4 screw holes to adapt to 2.5" drive
- Comes with a redundant PSU 80+ Platinum
- One front access USB 3.0 port

Rear View




Specifications


Dimensions (W x D x H)	mm : 430 x 680 x 88		
	inches : 17 x 26.8 x 3.5		
Industry Standard	EIA-RS310D		
Material	Heavy-duty preplated SGCC cold-rolled steel		
Color	Front Panel : Black		
Cooling	3 x 80x38mm PWM & low-power consumption hot swap fans		
Power Supply	800W 1+1 redundant PSU PMBus 1.2 80+ Platinum		
Expansion Slots	7 low profile		
Front Panel	System power on/off, System ID, System reset and 1 x USB 3.0 port		
LED Indicators	Power, LAN, Drive, Alert and ID		
System Board	12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant MB		
Drive Bays	External	3.5" hot swap	12
		2.5" hot swap	Options: • 2 x 2.5" (7mm) hot swap • 2 x 2.5" (15mm) internal
	Internal	2.5"	

Backplane	Options	1 x 12-port 12Gb SATA/SAS backplane with 28-PHY expander chip and 3 SFF-8643 connectors
		1 x 12-port SATA/SAS backplane with 3 x SFF-8643 connectors
Storage Temperature	0°C(32°F) ~ 50°C(122°F)	
Humidity	5%~95% non-condensing	
Gross Weight	(w/ PSU & Rail)	kgs : 23.5
		lbs : 51.8
Packaging Dimensions	(W x D x H)	mm : 645 x 835 x 224
		inches : 25.4 x 32.9 x 8.8
Cubic Feet	5.38	
Container Load Quantity	20'	200
	40'	420
	40' H	450
Mounting	Standard	28" tool-less slide rail

Top View

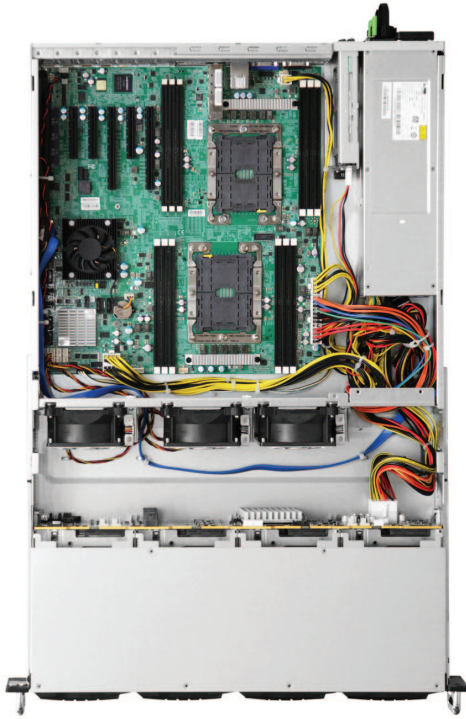

(Power supply is optional. Motherboard is not included.)

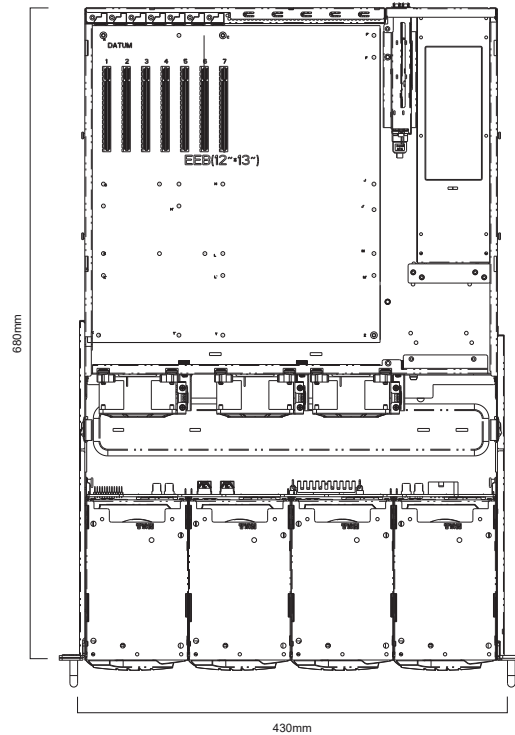

Ordering Information

SKU Number	Description
XE1-2ET00-03	[BTO SKU] 2U 12x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 800W CRPS Platinum redundant power supply, 2x 7mm 2.5" hot-swap OS, low profile rear panel, rail, 2U12 SAS 12G passive backplane support 4x NVMe (for PCIe Gen3 device only / option customized cable)
XE1-2ET00-04	2U 12x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 550W CRPS Platinum redundant power supply, 2x 7mm 2.5" hot-swap OS, low profile rear panel, rail, 2U12 SAS 12G passive backplane
XE1-2ET00-05	2U 12x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 800W CRPS Platinum redundant power supply, 2x 7mm 2.5" hot-swap OS, low profile rear panel, rail, 2U12 SAS 12G passive backplane
XE1-2ET00-15	2U 12x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 1200W CRPS Platinum redundant power supply, 2x 7mm 2.5" hot-swap OS, low profile rear panel, rail, 2U12 SAS 12G passive backplane
XE1-2ET00-18	2U 12x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 800W CRPS Platinum redundant power supply, 2x 7mm 2.5" hot-swap OS, low profile rear panel, rail, 2U12 SAS 12G expander controller on backplane (35X series)
XE1-2ET00-20	2U 12x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 550W CRPS Platinum redundant power supply, 2x 7mm 2.5" hot-swap OS, low profile rear panel, rail, 2U12 SAS 12G expander controller on backplane (35X series)
XE1-2ET00-21	2U 12x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 800W CRPS Platinum redundant power supply, 2x 15mm 2.5"HDD internal OS, low profile rear panel, rail, 2U12 SAS 12G expander controller on backplane (35X series)
XE1-2ET00-22	2U 12x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 800W CRPS Titanium redundant power supply, 2x 7mm 2.5" hot-swap OS, low profile rear panel, rail, 2U12 SAS 12G expander controller on backplane (35X series)