


OVERVIEW

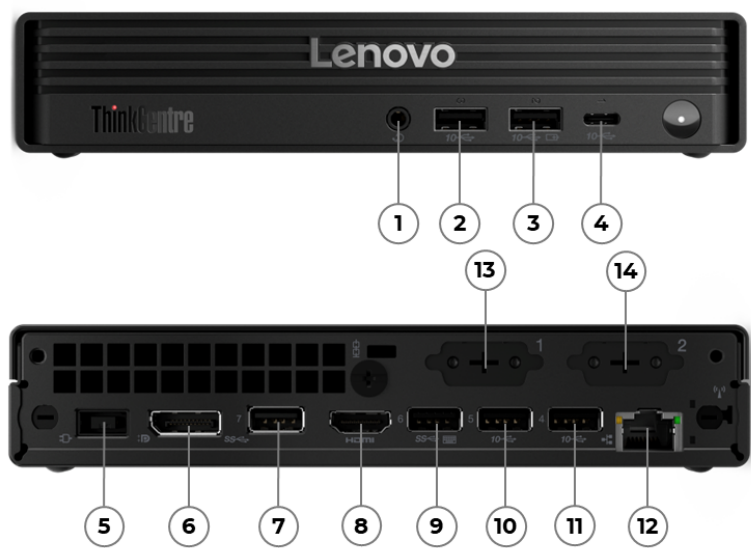

1. Headphone / microphone combo jack (3.5mm)	8. HDMI 2.1 TMDS
2. USB-A (USB 10Gbps)	9. USB-A (USB 5Gbps), with Smart Power On
3. USB-A (USB 10Gbps), Always On and 5V@2.1A charging	10. USB-A (USB 10Gbps)
4. USB-C (USB 10Gbps), data transfer only	11. USB-A (USB 10Gbps)
5. Power connector	12. Ethernet (GbE RJ-45)
6. DisplayPort 1.4a (HBR2)	13. Punch out port 1 *
7. USB-A (USB 5Gbps)	14. Punch out port 2 *

- Notes:
- Items with * are only available on selected models
 - Port 10 and port 11 are USB-A (Hi-Speed USB) on models with Intel B860 Chipset

PERFORMANCE

Processor

Processor Family

Intel® Core™ Ultra 5 / 7 Processor (Series 2)

Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics	NPU	Overall TOPS
Core Ultra 5 225T	10 (6 P-core + 4 E-core)	10	P-core 2.5GHz / E-core 1.9GHz	P-core 4.9GHz / E-core 4.4GHz	22MB L2 Cache / 20MB Intel® Smart Cache	Intel® Graphics	Intel® AI Boost, up to 13 TOPS	Up to 23 TOPS
Core Ultra 5 235T	14 (6 P-core + 8 E-core)	14	P-core 2.2GHz / E-core 1.6GHz	P-core 5.0GHz / E-core 4.4GHz	26MB L2 Cache / 24MB Intel® Smart Cache	Intel® Graphics	Intel® AI Boost, up to 13 TOPS	Up to 27 TOPS
Core Ultra 5 245T	14 (6 P-core + 8 E-core)	14	P-core 2.2GHz / E-core 1.7GHz	P-core 5.1GHz / E-core 4.5GHz	26MB L2 Cache / 24MB Intel® Smart Cache	Intel® Graphics	Intel® AI Boost, up to 13 TOPS	Up to 29 TOPS
Core Ultra 7 265T	20 (8 P-core + 12 E-core)	20	P-core 1.5GHz / E-core 1.2GHz	Max Turbo up to 5.3GHz / P-core 5.2GHz / E-core 4.6GHz	36MB L2 Cache / 30MB Intel® Smart Cache	Intel® Graphics	Intel® AI Boost, up to 13 TOPS	Up to 33 TOPS

AI (Artificial Intelligence)

AI PC Category

AI PC^[1]

NPU

Integrated Intel® AI Boost, up to 13 TOPS

Notes:

[1] AI PCs have a NPU capable of 10+ TOPs to run the Copilot assistant by pressing the optional Microsoft® Copilot key or using Win + C.

Operating System

Operating System

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 IoT Enterprise LTSC 2024
- Ubuntu Linux
- No preload operating system

Graphics

Graphics

Graphics	Type	Memory	Max Resolution	Connector	Key Features
Integrated Intel® Graphics	Integrated	Shared	1920x1080@60Hz(VGA), 4096x2160@60Hz(DP 1.4a HBR2), 4096x2160@60Hz(HDMI® TMDS), 7680x4320@60Hz(HDMI® FRL), 7680x4320@60Hz(Thunderbolt™ 4), 4096x2160@60Hz(USB-C® with DP function)	1x HDMI® 2.1 TMDS, 1x DP 1.4a HBR2, optional port 1 (VGA / HDMI® 2.1 TMDS / HDMI® 2.1 FRL / DP 1.4a HBR2 / USB-C® with DP 1.4a HBR2 function), optional port 2 (VGA / HDMI® 2.1 TMDS / HDMI® 2.1 FRL / Thunderbolt™ 4 / DP 1.4a HBR2)	DirectX® 12

Monitor Support

Monitor Support

Supports up to 4 independent displays via (onboard DP, onboard HDMI®, optional punch out port 1 [VGA / HDMI® 2.1 TMDS / HDMI® 2.1 FRL / DP 1.4a HBR2 / USB-C® with DP 1.4a HBR2 function], and optional punch out port 2 [VGA / HDMI® 2.1 TMDS / HDMI® 2.1 FRL / Thunderbolt™ 4/ DP 1.4a HBR2])

Chipset

Chipset

- Intel® B860 chipset^[1]
- Intel® Q870 chipset^[2]

Notes:

- [1] For models: 13HA, 13HK
- [2] For models: 13A4, 13A5, 13A7, 13BJ, 13E8

Memory

Max Memory^[1]

Up to 64GB (2x 32GB DDR5 SODIMM)

Memory Slots

Two DDR5 SODIMM slots, dual-channel capable

Memory Type

DDR5-5600

Notes:

- [1] The max memory is based on the test results with current Lenovo® memory offerings.

Storage

Max Storage Support^[1]

Up to two drives, 2x M.2 2280 SSD

- M.2 2280 SSD up to 2TB

Storage Type^{***}

Disk Type	Interface	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	Opal
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Performance	Opal

RAID

RAID 0/1 is supported on models with Intel®® Q870 Chipset (RAID preset only available via special bid models)

Notes:

- [1] The max capacity of each disk type is based on the test results with current Lenovo® storage offerings.

Removable Storage

Optical

None

Card Reader

No card reader

Multi-Media

Audio Chip^{**}

- High Definition (HD) Audio, Realtek® ALC233VB or Conexant CX11771 codec
- 24-bit DAC supports 44.1K/48K/96K sample rate, 2 channel DAC supports 24-bit PCM format
- 16-bit ADC supports 44.1K/48K/96K sample rate, 2 stereo ADC supports 16-bit PCM format

Speakers^{**}

- Premium single speaker, 2W x1
- Single speaker, 2W x1

Power Supply

Power Supply**^[1]

Power	Type	Efficiency	Key Features
65W	Adapter	89%	Autosensing
90W	Adapter	89%	Autosensing
135W	Adapter	90%	Autosensing
No power adapter	-	-	-

- Notes:
- ^[1] When work with TIO monitor, an appropriate power adapter is needed. Customer may need to:
- Order a Tiny for TIO MT (13A6, 13A7, 13HC, 13HD) models
 - Or order an additional 135W power adapter, if original power adapter is 90W or 65W

DESIGN

Input Device

Keyboard**

- Lenovo® Calliope Keyboard (USB connector), black
- Lenovo® Traditional Keyboard (USB connector), black
- Wireless EOS Keyboard, black
- No keyboard

Mouse**

- Lenovo® Calliope Mouse (USB connector), black
- Wireless EOS Mouse, black
- No mouse

Mechanical

Form Factor

Tiny (1L)

Dimensions (WxDxH)^[1]

Models	Dimensions
Tiny only	179 x 182.9 x 36.5 mm (7.05 x 7.2 x 1.44 inches)

Packaging Dimensions (WxDxH)

Tiny with Stand: 140 x 488 x 266 mm (19.21 x 5.51 x 10.47 inches)

Weight^[2]

Models	Weight
Tiny only	Around 1.18 kg (2.6 lbs)

Packaging Weight

Around 3.12kg (6.88 lbs)

Case Color

Raven black

Expansion Slots

Three M.2 slots (one for WLAN, two for SSD)^[3]

EOU

(Optional) toolless chassis open (toolless chassis screw required)

Stand

- Vertical stand
- No stand

Mounting

- Supports VESA mount 100mm

- None

Others

- (Optional) Dust filter
- (Optional) Power adapter cage
- Supports Smart Power On

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

[3] M.2 slot for SSD is M.2 PCIe® 4.0 x4 slot, supports up to 64Gbps on NVMe® drives

CONNECTIVITY

Network

WLAN + Bluetooth®**

- Intel® Wi-Fi® 6 AX203, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.2, M.2 card^[1]
- Realtek® Wi-Fi® 6E RTL8852CE, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card^[2]
- Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, Intel® vPro® technology support, M.2 card^[3]
- Realtek® Wi-Fi® 7 RTL8922AE, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4^[4]
- No WLAN and Bluetooth®

Onboard Ethernet

- Gigabit Ethernet, Intel® Ethernet Connection I219-LM, 1x RJ-45, supports Wake-on-LAN^[5]
- Gigabit Ethernet, Realtek® RTL8111K, 1x RJ-45, supports Wake-on-LAN^[6]

Optional Ethernet

- 2.5 Gigabit Ethernet, Realtek® RTL8125BGS, 1x RJ-45, supports Wake-on-LAN
- No optional Ethernet

Notes:

[1] Wi-Fi® 6 full features might be limited by country-level restrictions.

[2], [3] Wi-Fi® 6E full features might be limited by country-level restrictions.

6GHz Wi-Fi® 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi® 6E, and the regional regulatory certifications & spectrum allocation.

Bluetooth® 5.3 operation requires Windows® 11. For more information please visit [General Bluetooth® Support Information on Microsoft®](#).

[4] The bandwidth of WiFi 7 adapter is 160 MHz.

Wi-Fi® 7 operation is subject to the regulation rules in each country.

[5] For models with Intel® Q870 Chipset only

[6] For models with Intel® B860 Chipset only

Ports^[1]

Front Ports

- 1x USB-C® (USB 10Gbps / USB 3.2 Gen 2), data transfer only
- 2x USB-A (USB 10Gbps / USB 3.2 Gen 2), one supports Always On and 5V@2.1A charging
- 1x headphone / microphone combo jack (3.5mm)

Rear Ports

- 2x USB-A (Hi-Speed USB / USB 2.0)^[2]
- 2x USB-A (USB 10Gbps / USB 3.2 Gen 2)^[3]
- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1), one supports Smart Power On
- 1x HDMI® 2.1 TMDS
- 1x DisplayPort™ 1.4a (HBR2)
- 1x Ethernet (GbE RJ-45)

Optional Rear Ports

- Punch out port 1 (one of VGA / DisplayPort™ 1.4a HBR2 / HDMI® 2.1 TMDS / HDMI® 2.1 FRL / serial / 2.5GbE RJ-45 / USB-C® (USB 10Gbps / USB 3.2 Gen 2) with DisplayPort™ 1.4a HBR2 function and 100W PD in)
- Punch out port 2 (one of VGA / DisplayPort™ 1.4a HBR2 / HDMI® 2.1 TMDS / HDMI® 2.1 FRL / serial / 2.5GbE RJ-45 / Thunderbolt™ 4 (USB4® 40Gbps))

- 2x USB-A (USB 10Gbps / USB 3.2 Gen 2), occupies port 1 and 2

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

Thunderbolt™ 5: 80 Gbit/s (bidirectional), up to 120 Gbit/s in bandwidth boost mode for video-intensive applications.

[2] For models with Intel® B860 Chipset only, occupied port 10 and port 11. For detailed information, please see the [overview](#).

[3] For models with Intel® Q870 Chipset only, occupied port 10 and port 11. For detailed information, please see the [overview](#).

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

Physical Locks

Kensington® Security Slot™, 3 x 7 mm

Chassis Intrusion Switch

Chassis intrusion switch^[1]

Fingerprint Reader

No fingerprint reader

BIOS Security

- Administrator password
- Hard disk password
- Power-on password
- Absolute persistence module
- Boot sequence control
- Boot without keyboard and mouse
- Cover tamper detected
- Certificate-based BIOS authentication
- Configuration change detection
- Individual USB port disablement
- Intel® BIOS guard
- Secure wipe
- Secure boot
- Self-healing BIOS
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- More BIOS security features, please visit [BIOS Simulator](#)^[2]

Notes:

[1] Chassis intrusion switch is hardware ready function and needs to be special bid or manually enabled in BIOS.

[2] The BIOS simulator is just for reference. Default settings and some options may vary depending on the hardware, operating system and BIOS version.

MANAGEABILITY

System Management

System Management^[1]

- Intel® vPro® Enterprise
- Non-vPro®

Notes:

[1] Intel® vPro® offers a superset of DASH's defined capabilities.

SERVICE

Warranty^[1]

Base Warranty**

- 1-year courier or carry-in service
- 1-year limited onsite service
- 3-year courier or carry-in service
- 3-year limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://support.lenovo.com/warrantylookup/warrantypolicy>.

OPERATING REQUIREMENTS

Operating Environment

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

ENVIRONMENTAL

Sustainability

Material

60% PIC recycled plastic with 30% OBP used in cushion
30% OBP used in bag
FSC certified paper in packaging

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- (Optional) ENERGY STAR® 9.0
- (Optional) EPEAT™ Gold Registered
- RoHS compliant
- TCO Certified, generation 10

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

Other Certifications

Other Certifications

(Optional) TÜV Rheinland® Ultra Low Noise

Mil-Spec Test

MIL-STD-810H military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Solar Radiation, Contamination by Fluids, Salt Fog)

- Feature with ** means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Feature with *** means that one or more options listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

