
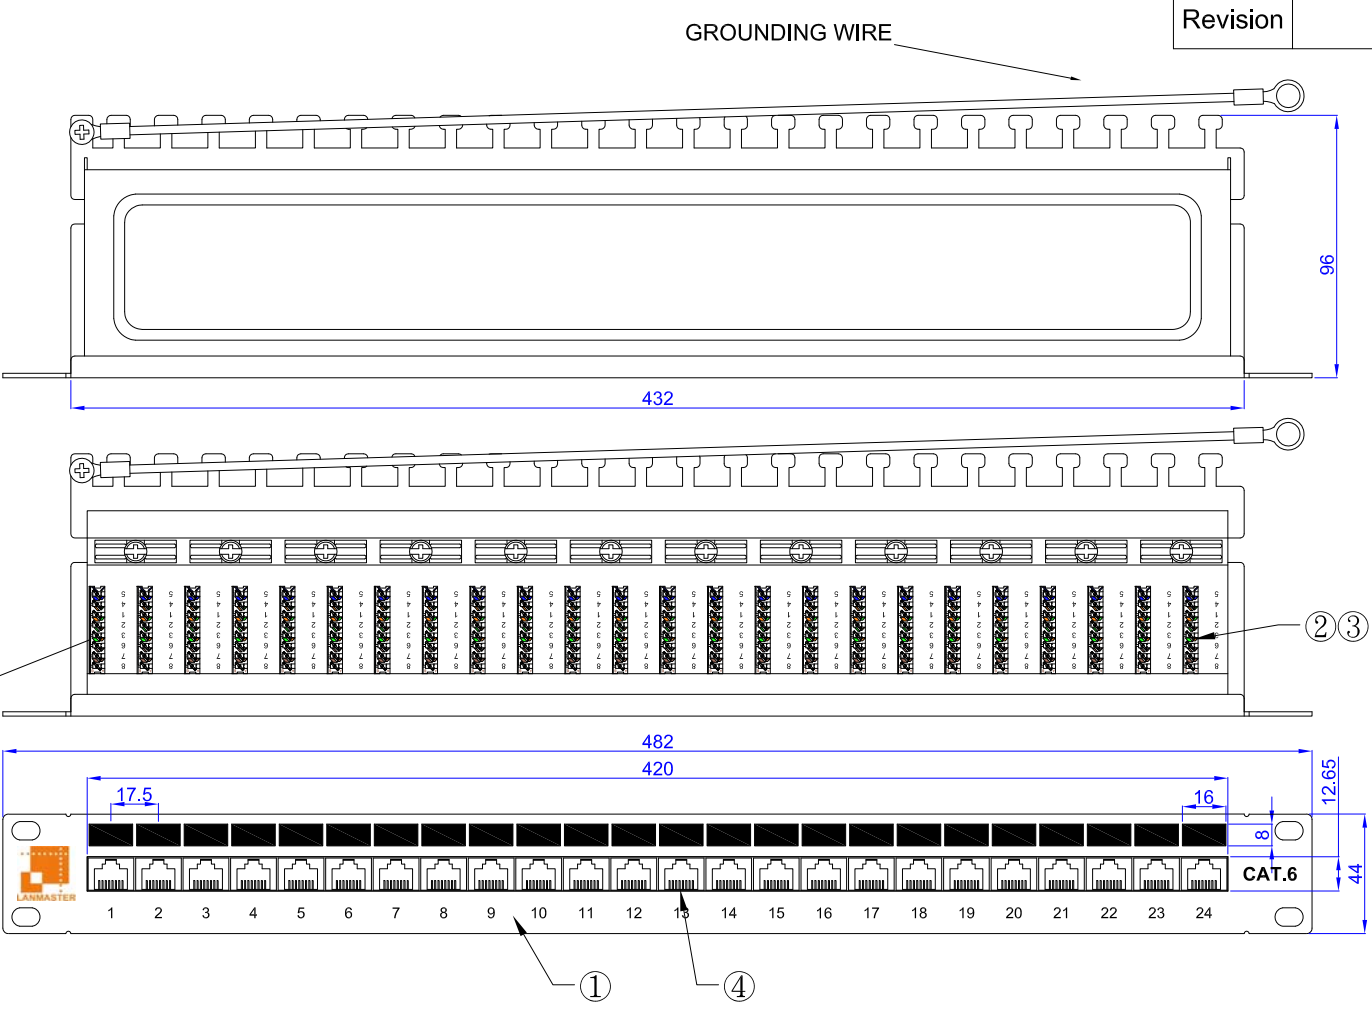
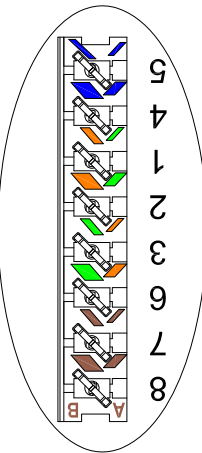


- Features :
- T-568A/B Dual wiring
  - RJ45 complies with FCC part 68 standard
  - 110/Krone dual IDC connector compatible
  - Provides termination for 22~26 AWG wire
  - Jack insertion life >750 mating cycles
  - IDC insertion life >250 mating cycles
  - Operating temperature : -40°C~+60°C

- Electrical :
- Contact resistance : 20m  $\Omega$
  - DC Current rating : 1.5Amps
  - DC resistance : Max.0.1  $\Omega$
  - Insulation Resistance : 500m  $\Omega$
  - Dielectric withstanding voltage : 1000V



| TOLERANCE |      |
|-----------|------|
| .XXXX     | ---  |
| .XXX      | 0.10 |
| .XX       | 0.25 |
| .X        | 0.38 |

| MATERIAL |             |                                                               |
|----------|-------------|---------------------------------------------------------------|
| ①        | FRAME       | METALLIC SPCC + PC                                            |
| ②        | IDC PLASTIC | PC, UL 94-V0                                                  |
| ③        | IDC CONTACT | PHOSPHOR BRONZE TIN OVER NICKEL                               |
| ④        | CONTACT     | 0.46 mm DIAMETER 50U" PHOSPHOR BRONZE GOLD PLATED OVER NICKEL |
| E        |             |                                                               |
|          |             |                                                               |
|          |             |                                                               |
|          |             |                                                               |

|                                                                                                                                                                              |  |               |             |                   |         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------|-------------|-------------------|---------|
| P/NO.                                                                                                                                                                        |  |               | LAN-PPL24S6 |                   |         |
| ITEM. Patch Panel                                                                                                                                                            |  | CO. LANMASTER |             | S/N. LAN-PPL24S6  |         |
| DR. Mark 2017/01/11                                                                                                                                                          |  | APPD.         |             | CHKD.             |         |
| <div><div><div></div><div></div></div><div>LANMASTER</div><div>.....</div><div>LANMASTER LIMITED</div><div>Unit 1011, Wu Sang House,655 Nathan Road, Kowloon, HK</div></div> |  |               |             | FILE. LAN-PPL24S6 |         |
|                                                                                                                                                                              |  |               |             | SCALE /           |         |
|                                                                                                                                                                              |  |               |             | UNIT mm           | SIZE A4 |