

ASUS NUC 13 Rugged

Make amazing experiences possible



NUC 13 Rugged kits and boards offer the perfect combination of performance, connectivity, and reliability all in a fanless, dust-resistant ruggedized chassis. Featuring the Intel® Processor N50 and Intel® Atom® processors, NUC 13 Rugged devices provide compute built for applications that expose the hardware to dust and offers superior protection against shocks and vibration. Additionally, select kits have been designed to withstand extended external ambient temperatures (0-50°C on select SKUs) to ensure uninterrupted performance in the most challenging conditions.

Key Selling Points

Distributors:

- High-quality and reliable, rugged design.
- Five-year availability commitment (Config B and C).
- Three-year limited warranty

ISVs:

- NUC Pro Software Suite to unlock more software robustness.
- Easier scalability via wide distribution.
- Processor options to support a range of customer needs.

Appliance or device developers:

- Board-only options.
- High-quality and reliable, rugged design.
- Hardware and firmware robustness.

Audience:

- Channel partners
- Edge-based business solution providers

Hardware and software solution providers:

- High-quality and reliable, rugged design.
- Five-year availability commitment (Config B and C).
- Three-year limited warranty.

Customization options (Configuration flexibility to fit partner and customer needs):

Partners can choose from three different processor options with varying levels of heat resistance and processing power:

- Intel® processor N50 (2-core, 6-watt) at 40°C
- Intel Atom® processor x7211E (2-core, 6-watt) at 50°C
- Intel Atom® processor x7425E (4-core, 12-watt) at 40°C max

*Additionally, a board-only option is available for partners looking to manufacture their own devices based on ASUS NUC.

Target Usages:

- NUC Pro Software Suite
- Intel TCC for real-time processing support and TSN for real-time communications support
- MIPI camera support (board SKU only)

ASUS NUC 13 Rugged

Kit NUC13BRK (Config A) Specifications



Image A - Configuration A

Marketing Name	ASUS NUC 13 Rugged Kit
Project Code	NUC13BRK (Config A)
Photo	Image A
ASUS Logo	N/A
ASUS NUC Logo	N/A
Color	N/A
OS Support	Supports Windows 10 IoT-Enterprise LTSC 64-bit Windows 11 Pro 64-bit Ubuntu 22.04 LTS 64-bit RedHat Enterprise Linux 64-bit *No OS installed at shipment
CPU	Intel® Processor N50, cTDP 6W
Chipset	Integrated
Graphics	Intel® UHD Graphics Technology
Memory	1 x SO-DIMM, Up to DDR5-4800, 16GB*1
Storage	64GB eMMC soldered-down 1x M.2 2280 PCIe x2 Gen4x4, supports 128GB~4TB NVMe SSD 1x M.2 3042 PCIe SATA, supports 128GB-2TB SSD, w/ 1 x USB3.2 Gen2
Wireless Network	Intel® Wi-Fi 6E AX210 (Gig+), Bluetooth® v5.3
LAN	2 x Intel® Ethernet Controller I226-V, 2.5G
Audio	N/A
TPM	fTPM
Card Reader	N/A
HDMI CEC	Yes, 2 ports on back panel
Front I/O Ports	N/A
Back I/O Ports	2 x USB 3.2 Gen2 Type A 2 x USB 2.0 Type A 2 x HDMI 2.1 (TMDS) 2 x RJ45 LAN 1 x DC-in
Side I/O Ports	1 x Kensington Lock
Power Supply	20VDC, 3.25A, 65W Power Adapter
Operating Temp	0 to 40°C
Storage Temp	-40 to 60°C
Humidity	0%-92% non-condensing ¹
Product Dimension (W x D x H)	174 x 108 x 25.9H mm (internal heatsink) [H: +3.4mm rubber feet]
Product Weight	0.7146kg
Color Box Dimensions (W x D x H)	225 x 160 x 120mm
Packaged Weight	1.7kg
Accessories	AC Adapter+Power Cord (only for US, EU, CN, TW & JP) Safety/Caution/Regulatory Insert Warranty Card/Quick Start Guide/VESA Mount Insert

⁽¹⁾ Humidity Info detail please check link: [Non-condensing humidity as defined by temperature vs dew point.](#)

ASUS NUC 13 Rugged

Kit NUC13BRF (Config B & C) Specifications



Image B - Configuration B or C with WWAN

Marketing Name	ASUS NUC 13 Rugged Kit	ASUS NUC 13 Rugged Kit
Project Code	NUC13BRF (Config B)	NUC13BRF (Config C)
Photo	Image B	Image B
ASUS Logo	N/A	N/A
ASUS NUC Logo	N/A	N/A
Color	N/A	N/A
OS Support	Supports Windows 10 IOT-Enterprise LTSC 64-bit Windows 11 Pro 64-bit Ubuntu 22.04 LTS 64-bit RedHat Enterprise Linux 64-bit *No OS installed at shipment	Supports Windows 10 IOT-Enterprise LTSC 64-bit Windows 11 Pro 64-bit Ubuntu 22.04 LTS 64-bit RedHat Enterprise Linux 64-bit *No OS installed at shipment
CPU	Intel® Atom® x7211E, cTDP 6W	Intel® Atom® x7425E, cTDP 12W
Chipset	Integrated	Integrated
Graphics	Intel® UHD Graphics Technology	Intel® UHD Graphics Technology
Memory	1 x SO-DIMM, Up to DDR5-4800, 16GB*1 w/optional "in-band" ECC support	1 x SO-DIMM, Up to DDR5-4800, 16GB*1 w/optional "in-band" ECC support
Storage	64GB eMMC soldered-down 1x M.2 2280 PCIe x2 Gen4x4, supports 128GB~4TB NVMe SSD 1x M.2 3042 PCIe SATA, supports 128GB-2TB SSD, w/ 1 x USB3.2 Gen2	64GB eMMC soldered-down 1x M.2 2280 PCIe x2 Gen4x4, supports 128GB~4TB NVMe SSD 1x M.2 3042 PCIe SATA, supports 128GB-2TB SSD, w/ 1 x USB3.2 Gen2
Wireless Network	Intel® Wi-Fi 6E AX210 (Gig+) w/External Antenna, Bluetooth® v5.3	Intel® Wi-Fi 6E AX210 (Gig+) w/External Antenna, Bluetooth® v5.3
LAN	2 x Intel® Ethernet Controller I226-V, 2.5G ²	2 x Intel® Ethernet Controller I226-LM, 2.5G
Audio	N/A	N/A
TPM	fTPM	fTPM
Card Reader	N/A	N/A
HDMI CEC	Yes, 2 ports on back panel	Yes, 2 ports on back panel
Front I/O Ports	N/A	N/A
Back I/O Ports	2 x USB 3.2 Gen2 Type A 2 x USB 2.0 Type A 2 x HDMI 2.1 (TMDS) 2 x RJ45 LAN 1 x DC-in	2 x USB 3.2 Gen2 Type A 2 x USB 2.0 Type A 2 x HDMI 2.1 (TMDS) 2 x RJ45 LAN 1 x DC-in
Side I/O Ports	1 x Kensington Lock	1 x Kensington Lock
Power Supply	20VDC, 4.5A, 90W Power Adapter	20VDC, 4.5A, 90W Power Adapter
Operating Temp	0 to 50°C	0 to 50°C
Storage Temp	-40 to 60°C	-40 to 60°C
Humidity	0%-92% non-condensing ¹	0%-92% non-condensing ¹
Product Dimension (W x D x H)	174 x 108 x 35.8H mm (external heatsink) [H: +3.4mm rubber feet]	174 x 108 x 35.8H mm (external heatsink) [H: +3.4mm rubber feet]
Product Weight	1.0369kg	1.0369kg
Color Box Dimensions (W x D x H)	225 x 160 x 120mm	225 x 160 x 120mm
Packaged Weight	1.7kg	1.7kg
Accessories	AC Adapter+Power Cord (only for US, EU, CN, TW & JP) Safety/Caution/Regulatory Insert Warranty Card/Quick Start Guide/VESA Mount Insert	AC Adapter+Power Cord (only for US, EU, CN, TW & JP) Safety/Caution/Regulatory Insert Warranty Card/Quick Start Guide/VESA Mount Insert

⁽¹⁾ Humidity Info detail please check link: [Non-condensing humidity as defined by temperature vs dew point.](#)

ASUS NUC 13 Rugged

Kit NUC13BRFN (Config C) Specifications



Image C - Configuration C with Wi-Fi

Marketing Name	ASUS NUC 13 Rugged Kit	
Project Code	NUC13BRFN (Config C)	
Photo	Image C	
ASUS Logo	N/A	
ASUS NUC Logo	N/A	
Color	N/A	
OS Support	Supports Windows 10 IOT-Enterprise LTSC 64-bit Windows 11 Pro 64-bit Ubuntu 22.04 LTS 64-bit RedHat Enterprise Linux 64-bit *No OS installed at shipment	
CPU	Intel® Atom® X7425e, cTDP 12W	
Chipset	Integrated	
Graphics	Intel® UHD Graphics Technology	
Memory	1 x SO-DIMM, Up to DDR5-4800, 16GB*1 w/optional "in-band" ECC support	
Storage	64GB eMMC soldered-down 1x M.2 2280 PCIe x2 Gen4x4, supports 128GB~4TB NVMe SSD 1x M.2 3042 PCIe SATA, supports 128GB-2TB SSD, w/ 1 x USB3.2 Gen2	
Wireless Network	N/A	
WWAN(LTE/SIM)	Intel® Atom® x7425E: WWAN* + Bluetooth® v5.3 + (External Antenna)*	
LAN	2 x Intel® Ethernet Controller I226-LM, 2.5G	
Audio	N/A	
TPM	fTPM	
Card Reader	N/A	
HDMI CEC	Yes, 2 ports on back panel	
Front I/O Ports	N/A	
Back I/O Ports	2 x USB 3.2 Gen2 Type A 2 x USB 2.0 Type A 2 x HDMI 2.1 (TMDS) 2 x RJ45 LAN 1 x DC-in	
Side I/O	1 x Kensington Lock	
Power Supply	20VDC, 4.5A, 90W Power Adapter	
Operating Temp	0 to 50°C	
Storage Temp	-40 to 60°C	
Humidity	0%-92% non-condensing ¹	
Product Dimension (W x D x H)	174 x 108 x 35.8H mm (external heatsink)	
Product Weight	[H: +3.4mm rubber feet] 1.0458kg	
Color Box Dimensions (W x D x H)	225 x 160 x 120mm	
Packaged Weight	1.7 kg	
Accessories	AC Adapter+Power Cord (only for US, EU, CN, TW & JP) Safety/Caution/Regulatory Insert Warranty Card/Quick Start Guide/VESA Mount Insert	
Notes	Supports WWAN/LTE Connectivity. Customers must purchase both the module & SIM card separately. See below for module types detail info.	
*WWAN QVL		
m.2 30x42	EM06-A\EM06-E	Quectel
m.2 30x42	FM101-GL	Fibocom

⁽¹⁾ Humidity Info detail please check link: [Non-condensing humidity as defined by temperature vs dew point.](#)



(Image D- Config A)



(Image E- Config C)

ASUS NUC 13 Rugged


Board Specifications

Marketing Name	NUC 13 Rugged Board	
Project Code	NUC13BRB (Config A)	
Photo	Image D	Image E
ASUS Logo	N/A	N/A
ASUS NUC Logo	N/A	N/A
Color	N/A	N/A
OS Support	Supports Windows 10 IOT-Enterprise LTSC 64-bit Windows 11 Pro 64-bit Ubuntu 22.04 LTS 64-bit RedHat Enterprise Linux 64-bit *No OS installed at shipment	Supports Windows 10 IOT-Enterprise LTSC 64-bit Windows 11 Pro 64-bit Ubuntu 22.04 LTS 64-bit RedHat Enterprise Linux 64-bit *No OS installed at shipment
CPU	Intel® Processor N50, cTDP 6W	Intel® Atom® x7425E, cTDP 12W
Chipset	Integrated	Integrated
Graphics	Intel® UHD Graphics Technology	Intel® UHD Graphics Technology
Memory	1 x SO-DIMM, Up to DDR5-4800, 16GB*1	1 x SO-DIMM, Up to DDR5-4800, 16GB*1 w/optional "in-band" ECC support
Storage	64GB eMMC soldered-down 1x M.2 2280 PCIe x2 Gen4x4, supports 128GB~4TB NVMe SSD 1x M.2 3042 PCIe SATA, supports 128GB-2TB SSD, w/ 1 x USB3.2 Gen2	64GB eMMC soldered-down 1x M.2 2280 PCIe x2 Gen4x4, supports 128GB~4TB NVMe SSD 1x M.2 3042 PCIe SATA, supports 128GB-2TB SSD, w/ 1 x USB3.2 Gen2
Wireless Network	N/A	N/A
WWAN(LTE/SIM)	N/A	Intel® Atom® x7425E: WWAN* + Bluetooth® v5.3 + (External Antenna)*
LAN	2 x Intel® Ethernet Controller I226-V, 2.5G	2 x Intel® Ethernet Controller I226-LM, 2.5G
Audio	N/A	N/A
TPM	fTPM	fTPM
Card Reader	N/A	N/A
HDMI CEC	Yes, 2 ports on back panel	Yes, 2 ports on back panel
Front I/O Ports	N/A	N/A
Back I/O Ports	2 x USB 3.2 Gen2 Type A 2 x USB 2.0 Type A 2 x HDMI 2.1 (TMDS) 2 x RJ45 LAN 1 x DC-in	2 x USB 3.2 Gen2 Type A 2 x USB 2.0 Type A 2 x HDMI 2.1 (TMDS) 2 x RJ45 LAN 1 x DC-in
Side I/O Ports	N/A	N/A
Power Supply	20VDC, 3.25A, 65W Power Adapter	20VDC, 4.5A, 90W Power Adapter
Operating Temp	0 to 40°C	0 to 50°C
Storage Temp	-40 to 60°C	-40 to 60°C
Humidity	0%-92% non-condensing ¹	0%-92% non-condensing ¹
Dimension (W x D x H)	146 x 101.7 x 17.39H mm	146 x 101.7 x 17.39H mm
Weight	0.1780kg	0.1780kg
Accessories	Safety/Caution/Regulatory Insert Warranty Card	Safety/Caution/Regulatory Insert Warranty Card
Note	Supports WWAN/LTE Connectivity. Customers must purchase both the module & SIM card separately. See below for module types detail info.	
*WWAN QVL		
m.2 30x42	EM06-A\EM06-E	Quectel
m.2 30x42	FM101-GL	Fibocom

⁽¹⁾ Humidity Info detail please check link: [Non-condensing humidity as defined by temperature vs dew point.](#)

ASUS NUC 13 Rugged

Connections

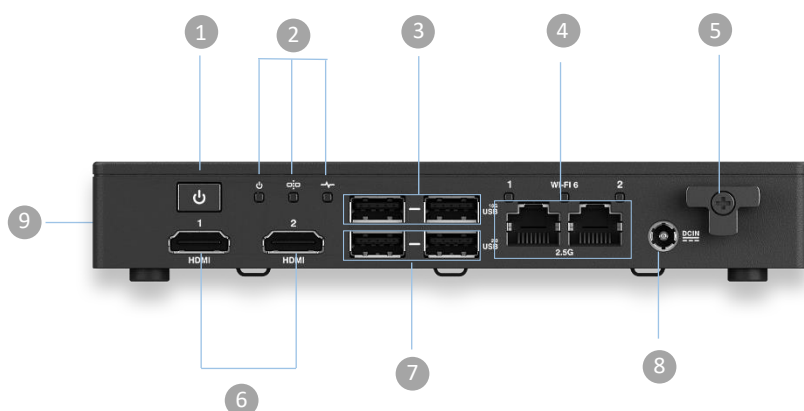


Configuration A

- 1 1 x Power Bottom
- 2 3 x LED Indicators
- 3 2 x USB 3.2 Gen 2, Type-A
- 4 1 x Intel® 2.5 Gb Ethernet Port
- 5 1 x Cable Locking Arm
- 6 2 x HDMI (4K@60Hz)
- 7 2 x USB 2.0, Type-A
- 8 1 x DC-in
- 9 1 x Kensington Lock (Side Port)


Configuration B or C with Wi-Fi

- 1 1 x Power Bottom
- 2 3 x LED Indicators
- 3 2 x USB 3.2 Gen 2, Type-A
- 4 1 x Intel® 2.5 Gb Ethernet Port
- 5 1 x Cable Locking Arm
- 6 2 x HDMI (4K@60Hz)
- 7 2 x USB 2.0, Type-A
- 8 1 x DC-in
- 9 2 x Antenna Port
- 10 1 x Kensington Lock (Side Port)

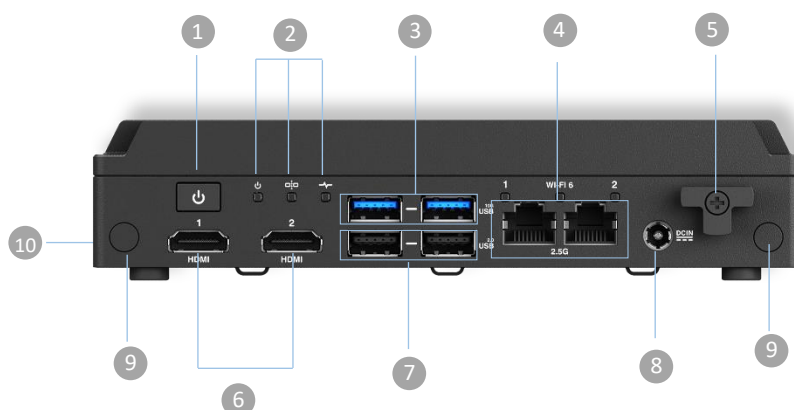

ASUS NUC 13 Rugged

Connections

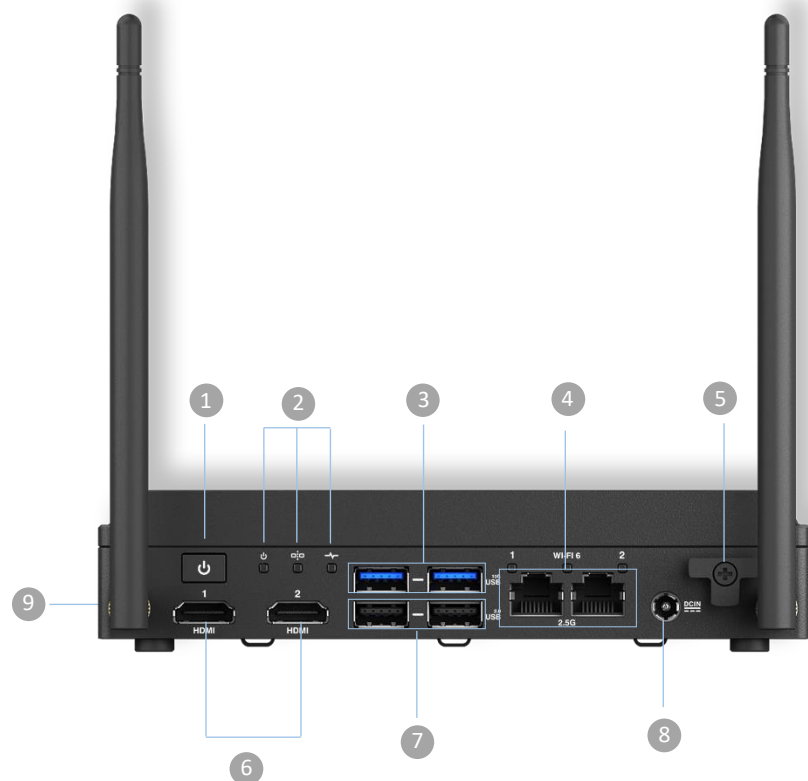

Configuration C with WWAN

- 1 1 x Power Bottom
- 2 3 x LED Indicators
- 3 2 x USB 3.2 Gen 2, Type-A
- 4 1 x Intel® 2.5 Gb Ethernet Port
- 5 1 x Cable Locking Arm
- 6 2 x HDMI (4K@60Hz)
- 7 2 x USB 2.0, Type-A
- 8 1 x DC-in
- 9 1 x Kensington Lock (Side Port)

ASUS NUC 13 Rugged

What's in the box



Or
Or


NUC 13 Rugged




Inserts



VESA bracket (For
DIN and VESA) and
Screws



Power Adapter
65 / 90W power supply



Power Cord*

*DIN Rail not included. Please see below for purchase details.

Category	Type	Description	Purchase Details
Mounting Bracket	DIN Rail	Side brackets shall provide support for attaching chassis to DIN with bracket: 	Digikey.com

NOTE:

- The most up-to-date and accurate product specifications are available on www.asus.com for download.
- Product and accessory images are for illustrative purposes only. The actual appearance and specifications may vary depending on the model.
- *The bundled power adapter may vary depending on the model and the country (or region) of sale.
- Some bundled accessories may vary depending on the model. For details on these accessories, refer to their respective user manuals.
- If the device or its components fail or malfunction during normal and proper use within the warranty period, bring the warranty card to the ASUS Service Center for replacement of the defective components.

Specifications, content, and product availability are all subject to change without notice and may differ from country to country. Actual performance may vary depending on the application, usage, environment, and other factors. Full specifications are available at <http://www.asus.com>