

# DH-CS4005-4ET1GT-60

5-Port Cloud Managed Desktop Switch with 4-Port PoE



## PoE 2.0

### Series Overview

Highly intuitive, the Switch can be managed in local networks. With the DoLynk platform, it additionally enables seamless cloud management capabilities. With just one click, you can start both the CCTV and IT system through EasyConfig. The switch performs operation and maintenance using topology visualization on front-end, transmission and back-end storage devices. It can effortlessly turn on and off its managed mode with the simple flip of a switch. Additionally, the switch supports abundant PoE 2.0 features. With full metal design, it has great heat dissipation and can operate in temperatures ranging  $-10^{\circ}\text{C}$  to  $55^{\circ}\text{C}$  ( $+14^{\circ}\text{F}$  to  $+131^{\circ}\text{F}$ ). It also features surge protection against up to 6 kV, resisting interference from static electricity, lightning and pulses. The switch can be used in small and medium-sized businesses such as supermarkets, offices, restaurants, cafés and hotels.

### Functions

#### Cloud Management

Devices can be managed through the DoLynk Care app and performs real-time monitoring of the network. The app also displays the status of devices, triggers alarms for errors in real time and sends notifications.

#### Network Topology Management

Supports the LLDP protocol and is able to generate and display the network topology, so that you can quickly identify issues, and perform operation and maintenance remotely on devices that are in the topology.

#### Long Distance PoE

The transmission distance of a PoE port can be up to 250 m, meeting the requirement of wired transmission (bandwidth reduced to 10 Mbps).

- 4 x RJ-45 10/100 Mbps PoE ports, 1 x RJ-45 Gigabit ports. 60 W total PoE budget, 802.3af/at on all PoE ports, additional Hi-PoE on orange port. DIP switch to fast turn on/off working mode of Cloud-Managed, PoE Watchdog, Long Distance PoE. Wide operating temperature ranging from  $-10^{\circ}\text{C}$  to  $55^{\circ}\text{C}$ . Supports VLAN and loop protection. WEB-managed and centralized cloud management through the DoLynk App and performs real-time monitoring of the network. Easy config to auto detect and set up network and security systems.



#### PoE Watchdog

Adopts the innovative PoE Watchdog. It enables the switch to automatically detect port status and restart the failed ports to recover connection in case of IPC connection exception. This enables intelligent operation and maintenance management in its true sense and effectively reduces manual maintenance costs.

#### Loop Protection

When a loop is detected, the loop alarm will be triggered and the elimination mechanism will activate to prevent broadcast storms from occurring.

#### Managed Mode ON/OFF

Easily switches between managed and unmanaged mode with just the flip of a switch. When in managed mode, you can perform management through the webpage locally or the cloud platform. This allows the device to seamlessly adapt to a variety of scenes.

### Scene

Suitable for scenes such as houses, factories and offices.

# Cloud Managed PoE Switch | DH-CS4005-4ET1GT-60

| Technical Specification          |   | Feature  |  |                 |
|----------------------------------|---|--|--|-----------------|
| Basic                            |   | Packet Buffer Size   | 4 Mbit   |                 |
| Layer                            | Layer 2   | Jumbo Frame  | 9216 Byte  |                 |
| Switching Capacity               | 2.8 Gbps  | MAC Table Size   | 2K   |                 |
| Packet Forwarding Rate           | 2.08 Mpps   | Communication Standard   | IEEE 802.3; IEEE 802.3u; IEEE 802.3x; IEEE 802.3ab; IEEE 802.3az   |                 |
| Description of Function Slots    | Port 1-4: 4 × RJ-45 10/100 Mbps (PoE); Port 5: 1 × RJ-45 10/100/1000 Mbps (uplink)  | VLAN Number  | 32   |                 |
| Operating Temperature            | -10 °C to +55 °C (+14 °F to +131 °F)  | Feature  |  |                 |
| Operating Humidity               | 10%–90% (RH), non-condensing  | VLAN Function  | IEEE 802.1Q VLAN   |                 |
| Storage Temperature              | -40 °C to +70 °C (-40 °F to +158 °F)  | Port Feature   | IEEE 802.3x Flow Control; Unknown Unicast Suppression; Multicast Storm Control; Broadcast Storm Control; MAC+Port Binding Loop; Prevention |                 |
| Storage Humidity                 | 5%–95% (RH), non-condensing   | Mirror   | N:1 Mirroring; Local Port Mirroring  |                 |
| Power Supply                     | External power supply: 53 VDC, 1.22 A   | Reliability  | LLDP   |                 |
| Power Consumption                | Idle: ≤3 W<br>Full load: 65 W   | DHCP Function  | DHCP Client  |                 |
| Statics Protection               | Air discharge: 8 kV; Contact discharge: 6 kV  | Security   | Port Isolation   |                 |
| Lightning Protection             | Common mode: 6 kV; Differential mode: 0 kV  | Equipment Management   | Web Management; Cloud Management; Logs; Fault Alarm  |                 |
| Net Weight                       | 0.2 kg (0.44 lb)  | General  |  |                 |
| Gross Weight                     | 0.76 kg (1.68 lb)   | Packing List   | Quick Start Guide × 1; Legal and Regulatory Information × 1; Power adapter × 1; Power cord × 1   |                 |
| Product Dimensions               | 115 mm × 84 mm × 27 mm (4.53" × 3.33" × 1.06") (L × W × H)  | Transmission Performance   |  |                 |
| Packaging Dimensions             | 195 mm × 114 mm × 83 mm (7.68" × 4.49" × 3.27") (L × W × H)   | Switch power supply voltage 53V. CAT5E/CAT6. Max. DC resistance < 10Ω/100m |  |                 |
| Casing Material                  | Sheet metal   | Cable(m)   | Load Capacity(W)   | Bandwidth(Mbps) |
| Installation                     | Desktop mount; wall mount   | IEEE802.3bt 90W  |  |                 |
| Certifications                   | CE  | 100  | 71.3   | 1000            |
| PoE                              |   | 150  | 62   | 10              |
| PoE                              | Yes   | 200  | 51   | 10              |
| PoE Power                        | Port 2-4≤30 W, port 1≤60 W, total≤60 W  | 250  | 40   | 10              |
| PoE Protocol                     | IEEE802.3af ; IEEE802.3at ; Hi-PoE  | Hi-PoE 60W   |  |                 |
| PoE Power Consumption Management | PoE power consumption management; PoE power on/off; turns off PoE if overload is detected   | 100  | 53   | 1000            |
| PoE Pin Assignment               | 1, 2, 4, 5 ( V+ ), 3, 6, 7, 8 ( V- )  | 150  | 50   | 10              |
| Long Distance PoE Transmission   | Yes   | 200  | 47   | 10              |
| Hardware                         |   | 250  | 37   | 10              |
| DIP Switch                       | Managed Mode: On by default for both local web and cloud management. Off for Unmanaged Mode.<br>PoE Watchdog: Monitors ports 1-4 and auto-restarts the PoE port when there is no traffic for 2 min. (Only works when Managed Mode is Off)<br>Extend Mode: Ports 1-4; transmission distance up to 250 meters at 10 Mbps. (Only works when Managed Mode is Off) | IEEE802.3at 30W  |  |                 |
| Reset Button                     | 1   | 100  | 25.5   | 1000            |
| Performance                      |   | 150  | 25.5   | 10              |
| MTBF                             | 232.62 years  | 200  | 25.5   | 10              |
|                                  |   | 250  | 25.5   | 10              |


# Cloud Managed PoE Switch | DH-CS4005-4ET1GT-60

Note: Data from this table was collected by Dahua test lab and is for reference only. The actual transmission distance may vary due to power consumption of connected devices or the cable type and status.


## Panels

### Ordering Information

| Type       | Model               | Description   |
|------------|---------------------|---|
| PoE Switch | DH-CS4005-4ET1GT-60 | 5-Port Cloud Managed Desktop Switch with 4-Port PoE |



### Installation

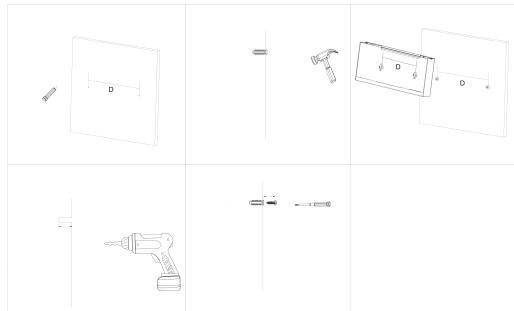

### Dimensions (mm[inch])

