

The world's most advanced mainstream PCIe Gen4® data center SSD¹



The Micron 7500 SSD is the world’s most advanced mainstream PCIe Gen4 data center SSD and the first with 200+ layer NAND. It is built with leading-edge technology to deliver low and consistent QoS latency, superior performance across a wide range of workloads, and broad support for Open Compute Project (OCP) features in standard firmware.

Improve storage performance with leading NAND² and enable openness with standard OCP features

Micron 232-layer NAND provides increased workload performance and power efficiency through a low-voltage NAND interface and 6-plane architecture with independent wordline read (iWL). A broad range of OCP features are standard.

Take advantage of Micron’s new class of sub-1ms 6x9 latency drives³

Low, consistent latency helps improve performance in multi-tenant cloud workloads and in latency-sensitive database workloads like online transaction processing, recommendation engines, real-time analytics, content distribution, and financial trading.

Accelerate your workloads with class-leading Gen4 speed

The 7500 SSD is a versatile solution that delivers the performance required by complex and critical business workloads.



Micron 7500 NVMe SSD (U.3/U.2), 15mm

A NEW CLASS OF SUB-1ms DATA CENTER SSDs

The Micron 7500 creates a new class of low and consistent QoS latency in mainstream SSDs.

This new, sub-1ms latency threshold helps bring better service levels and improved results to a broad range of data center workloads.

Micron 7500 SSD Key Benefits

Leading-edge Micron technology and NAND with broad OCP support⁴ brings efficiency, security,⁵ and openness

The Micron 7500 SSD is the world’s first mainstream data center SSD to ship with 200+ layer NAND, which delivers increased performance and improved power efficiency.

This SSD embraces security and openness by offering FIPS 140-3 Level 2 and TAA-compliant options, Micron’s Secure Execution Environment⁶ (SEE), and broad OCP 2.0 features support on standard firmware.

Low and consistent latency enables rapid, reliable responsiveness for demanding data center workloads

The Micron 7500 SSD is a new class of mainstream data center SSD.

It delivers consistently low, sub-1ms 6x9 QoS read latency to enable fast, reliable responsiveness that demanding workloads can count on.

In addition, it excels with mixed workloads, demonstrating up to 82% lower latency in a 70/30 read/write mix than its competition.

Superior performance for demanding workloads

The Micron 7500 brings class-leading performance to random mixed and sequential workloads.

1. Statement refers to the combination of NAND layer count, QoS 6x9 latency, performance, Open Compute Standard (OCP) 2.0 support, and security. Competitive comparisons for Gen 4 U.2/U.3 mainstream competitive SSD suppliers with at least 10% data center SSD market share as of August '23 as noted in Forward Insights analyst report SSD Supplier Status_Q2/Q3.
2. Only Micron 232-layer NAND enables NV-LPDDR4, an advanced, low-voltage interface that delivers per bit power savings of more than 30% compared to legacy interfaces.
3. Micron testing shows that the Micron 7500 SSD offers sub-1ms latency in 6x9s QoS with 4K 100% random read up to and including QD128.
4. The Micron 7500 SSD complies with most, but not all, requirements of the Open Compute Project Datacenter NVMe SSD Specification 2.0r21.
5. No hardware, software or system can provide absolute security under all conditions. Micron assumes no liability for lost, stolen or corrupted data arising from the use of any Micron products, including those products that incorporate any of the mentioned security features.
6. An isolated security processor within the SSD controller.

The Micron 7500 SSD is the world's most advanced mainstream data center SSD

The world's first mainstream SSD to use 200+ layer NAND, which enables increased performance and power efficiency, including a low-voltage interface that delivers 30% per-bit transfer savings and a 6-plane architecture with iWL for up to 50% faster random read results.^{7,8}

The Micron 7500 SSD is a secure drive for an open world. It provides broad OCP 2.0 support in standard Micron 7500 SSD firmware, as well as compelling security features including:

| Micron 7500 SSD Feature | Benefit |
|---|---|
| Micron's Secure Encrypted Environment (SEE) | A dedicated, isolated security processing hardware with physical isolation for security-related functions. Physical isolation helps protect against attacks. |
| Government-focused security options | FIPS 140-3 Level 2 and TAA-compliant options for federal government procurement requirements. ⁹ |
| Security flexibility | Self-Encrypting Drive (SED) TCG Opal 2.01 with AES-256 hardware-based data encryption and non-SED options available to help meet varied security deployment needs. Secure boot features help ensure firmware integrity on a running platform and defend against malware. Key-based firmware updates validate firmware using public key-based authentication prior to firmware update (malware protection). Strong asymmetric key support using standard, National Institute of Standards and Technology (NIST)-approved algorithms with 208-bit/3072-bit RSA keys for standardized, strong key support. |
| Key-based firmware update | Validates firmware using public key-based authentication prior to firmware update (malware protection). |

Table 1: Micron 7500 features and benefits

A new class of sub-1ms 6x9 latency SSDs has been created¹⁰

With this class-leading, sub-1ms 6x9 latency, the Micron 7500 SSD is a perfect match for workloads that benefit from low, consistent latency.

| Workload | Micron 7500 advantage | Workload | Micron 7500 advantage |
|---------------------|-----------------------|---------------------------------------|-----------------------|
| 100% read | Up to 83% lower | RocksDB 4KB random read | Up to 54% lower |
| 90% read, 10% write | Up to 75% lower | | |
| 80% read, 20% write | Up to 80% lower | RocksDB 4KB random read while writing | Up to 49% lower |
| 70% read, 30% write | Up to 82% lower | | |

Table 2: Micron 7500 SSD latency advantages

Accelerate your workloads with class-leading, PCIe Gen4 speed¹¹

Whether you are designing and building systems for AI, databases, content delivery / streaming delivery, real-time analytics, social media applications, cloud computing, virtualization, and more – the Micron 7500 SSD delivers superior performance.

| Workload | Micron 7500 advantage | Workload | Micron 7500 advantage |
|-----------------------|-----------------------|---------------------------------------|-----------------------|
| 100% random read | Up to 13% better | RocksDB 4KB random read | Up to 59% better |
| 100% random write | Up to 242% better | | |
| 100% sequential read | Up to 9% better | RocksDB 4KB random read while writing | Up to 2.1x better |
| 100% sequential write | Up to 97% better | | |

Table 3: Micron 7500 SSD performance advantages

- See <https://investors.micron.com/news-releases/news-release-details/micron-ships-worlds-first-232-layer-nand-extends-technology> for additional information.
- As of the time of this document's publication, only Micron 232-layer NAND enables NV-LPDDR4, an advanced, low-voltage interface that delivers per bit power savings of more than 30% compared to legacy interfaces.
- All features not available on all models. Contact your Micron sales representative for more information.
- Based on Micron internal testing using Flexible IO Tester (FIO) using a 4KB IO size and QD=128, see https://fio.readthedocs.io/en/latest/fio_doc.html for additional information on FIO. RocksDB statements based on Micron internal testing using RocksDB version 8.1.1 comparing 4KB random read and 4KB random read while writing workloads. See https://fio.readthedocs.io/en/latest/fio_doc.html for additional information on RocksDB.
- Based on public information available at the time of this document's publication. RocksDB statements based on Micron internal testing using RocksDB version 8.1.1 comparing 4KB random read and 4KB random read while writing workloads. See https://fio.readthedocs.io/en/latest/fio_doc.html for additional information on RocksDB.

Micron 7500 SSD key specifications


| U.3 | 7500 PRO: U.3/U.2 Read-Intensive, 1 Drive Write per Day | | | | | 7500 MAX: U.3/U.2 Mixed-Use, 3 Drive Writes per Day | | | | | |
|---|--|-------------------------|-------------------------|-------------------------|-------------------------|--|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | Capacity ¹² | 960GB | 1.92TB | 3.84TB | 7.68TB | 15.36TB | 800GB | 1.6TB | 3.2TB | 6.4TB | 12.8TB |
| Performance ¹³ | Seq. Read (MB/s) | 6,800 | 6,800 | 6,800 | 7,000 | 7,000 | 6,800 | 6,800 | 6,800 | 7,000 | 7,000 |
| | Seq. Write (MB/s) | 1,400 | 2,700 | 5,300 | 5,900 | 5,900 | 1,400 | 2,700 | 5,300 | 5,900 | 5,900 |
| | Rand. Read (K IOPS) | 800 | 1,000 | 1,100 | 1,100 | 1,100 | 800 | 1,000 | 1,100 | 1,100 | 1,100 |
| | Rand. Write (K IOPS) | 85 | 145 | 180 | 215 | 250 | 145 | 270 | 390 | 400 | 410 |
| | 70/30 Rand. Read/Write (K IOPS) | 130 | 260 | 350 | 450 | 530 | 200 | 370 | 510 | 650 | 700 |
| | Latency (TYP, µs) ¹⁴ | 70 (read) 15 (write) | 70 (read) 15 (write) | 70 (read) 15 (write) | 70 (read) 15 (write) | 70 (read) 15 (write) | 70 (read) 15 (write) | 70 (read) 15 (write) | 70 (read) 15 (write) | 70 (read) 15 (write) | 70 (read) 15 (write) |
| Endurance (total bytes written in TB) ¹⁵ | 1,752 | 3,504 | 7,008 | 14,016 | 28,032 | 4,380 | 8,760 | 17,520 | 35,040 | 70,080 | |

| Micron 7500 SSD: Common Features | | |
|----------------------------------|--------------------|---|
| Basic Attributes | Interface | PCIe Gen4 1x4, NVMe v2.0b |
| | NAND | Micron 200+ layer 3D TLC NAND |
| Reliability | MTTF ¹⁶ | MTTF: 2.0M hours @ 0-55°C and 2.5M hours @ 0-50°C |
| | UBER | <1 sector per 10 ¹⁸ bits read |
| | Warranty | 5 years |
| Environmental Characteristics | Power | Sequential read (average RMS value): 15.5W (PRO and MAX) Sequential write (average RMS value): 18.3W (PRO and MAX) |
| | Operating Temp. | 0-70°C (FOOTNOTE: If SMART temperature exceeds 77°C, performance will be throttled) |

Notes: All values provided are for reference only and are not warranted values. For warranty information, visit <https://www.micron.com/support/sales-support/returns-and-warranties/enterprise-ssd-warranty> or contact your Micron sales representative. Values represent the theoretical maximum endurance for the given transfer size and type. Actual lifetime will vary by workload.

Micron 7500 SSD Part Numbers

Micron 7500 SSD part number information is provided below for configuration-dependent values (shown in bold). Other part number values in the example part number are fixed. See the parts catalog at micron.com/7500 for more information.

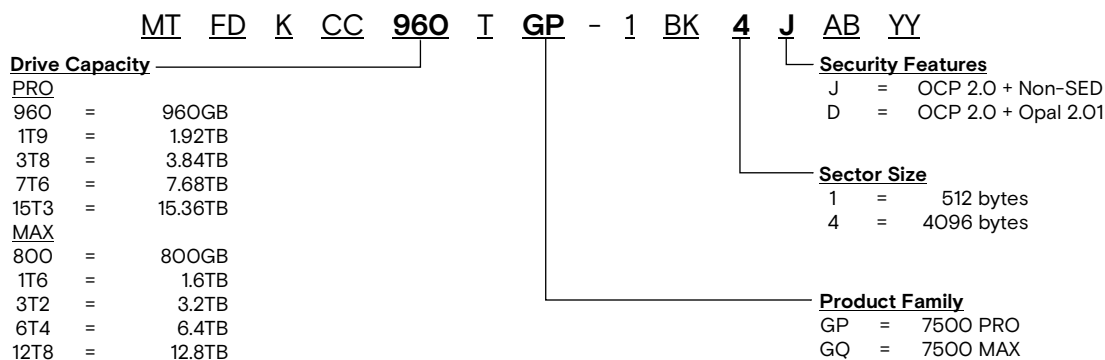

- Unformatted, 1GB = 1 billion bytes. Formatted capacity is less.
- Performance measured under the following conditions: Steady state as defined by SNIA Solid State Storage Performance Test Specification Enterprise v1.1; Drive write cache enabled; NVMe power state 0; Sequential workloads measured using FIO with a queue depth of 32; Random READ workloads measured using FIO with a queue depth of 256 (1,100,000 IOPS statement based on 4K sector size; Random WRITE workloads measured using FIO with a queue depth of 128.
- Latency values measured with random workloads using FIO, 4KB transfers, queue depth = 1; TYP = median, 50th percentile.
- Actual lifetime will vary by workload. Total bytes written calculated assuming drive is 100% full (user capacity) with workload of 100% random aligned 4KB. Refer to percentage used in the SMART/Health information (Log Identifier O2h) to check the device life used.
- Product achieves MTTf based on population statistics not relevant to individual units.

©2023 Micron Technology, Inc. All rights reserved. All information herein is provided on an "AS IS" basis without warranties of any kind, including any implied warranties, warranties of merchantability or warranties of fitness for a particular purpose. Micron, the Micron logo, and all other Micron trademarks are the property of Micron Technology, Inc. All other trademarks are the property of their respective owners. Products are warranted only to meet Micron's production data sheet specifications. Products, programs, and specifications are subject to change without notice. Rev. A 10/2023 CCM004-676576390-11713