

Pro NVR BOX Series



MS-N5008/MS-N5016



Full HD



Dual Stream



Exquisite
Appearance



Low
Consumption





Mobile
Connection

KEY FEATURES

- Linux OS embedded for stability
- End panel HDD slot design for easy installation
- Remote control
- Friendly GUI for configuration
- High profile H.264 coding and decoding
- Support 2*HDD(3.5'') max, 4TB each
- Support up to 16 IP Cameras
- DDNS for remote connection
- Multiple-level users
- Dual stream
- Size: 210mm(W)×143.2mm(D)×96mm(H)

DIMENSIONS (mm)

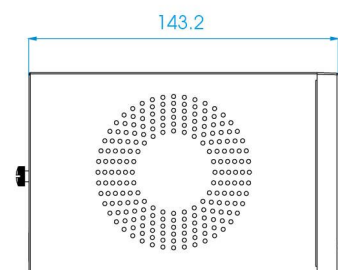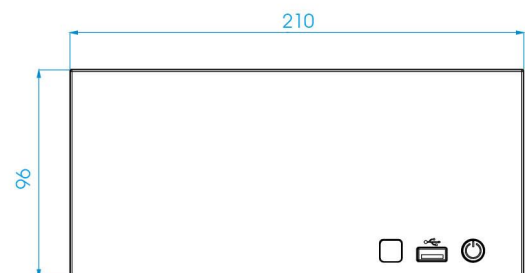



Model		MS-N5008	MS-N5016
Video/Audio Input	Network Video Input	8-ch	16-ch
	Bandwidth	40Mbps	80Mbps
Video/Audio Output	HDMI Output	1-ch, Resolution:1920x1080P/60Hz, 1920x1080P/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI supports Audio Output	
	Dual Stream	Support	
	Recording Resolution	3MP/1080P/UXGA/720P/VGA/D1/CIF/QCIF	
	Synchronous Preview/Playback	1*(20fps@3MP),2*(30fps@1080P), 4*(30fps@720P), 8*(30fps@D1)	2*(20fps@3MP),6*(30fps@1080P), 16*(30fps@720P), 16*(30fps@D1)
Video/Audio Compression	video Compression	H.264	
	Audio Compression	G.711 U-Law	
	Sample Rate	8KHz/16KHz	
	Synchronous Recording	8*3MP	16*3MP
Storage	Drivers	2 SATA HDD (3.5")	
	Capacity	Up to 4TB capacity for each HDD	
Recording Management	Recording	Manual recording, timing recording, motion detection recording, alarm recording, motion detection or alarm recording, motion detection and alarm recording	
	Snapshot	Manual Snapshot	
	Playback	Video playback, Image playback	
	Backup	Video backup, Image backup	
Network	Protocol	IPv4, HTTP, NTP, SMTP, PPPoE, DDNS	
External Interface	Network Interface	1 RJ45 100M/1000M	
	USB Interface	2 USB 2.0	
General	Power Supply	DC 12V 5A	
	Consumption(without HDD)	≤12W	
	Working Conditions	Temperature:-10℃~+55℃ Humidity:10%~90%	
	Dimensions	210mm(W)×143.2mm(D)×96mm(H)	
	Weight	2.5Kg	
	Warranty	2 years	

V3.05

