

# 4K H.265 Pro NVR 8000 Series



MS-N8032-UH/MS-N8064-UH

## DATASHEET

## KEY FEATURES

- ▶ **Powerful Decoding Capacity** (Maximum supporting 16\*1080P, 32\*720P or 64\*D1 network cameras viewing at the same time.)
- ▶ **HDMI & VGA** (Providing both HDMI and VGA ports for users to choose according to their monitor types.)
- ▶ **8\*3.5"HDD** (8 SATA of 3.5"HDD, providing 10TB capacity for each HDD, up to 80TB total hard disk storage.)
- ▶ **Dual LAN Interfaces** (Designed for three network working modes as Multi-address, Load Balance and Net Fault-tolerance.)
- ▶ **Video Content Analysis** (With 10 detection modes, VCA greatly enhances the performance bringing comprehensive surveillance functions.)


### H.265+H.264

Smartly figure out and switch between H.264 and H.265 automatically. It will extend the days to save recording file with H.265 than with other compressions.



### Dual Monitor Display

The primary monitor and secondary monitor can be configured separately and have their own display settings which enable users to have different liveview or playback display layout simultaneously, offering a more efficient and explicit surveillance.



### 4K Video Viewing Experience

Milesight 4K H.265 Pro NVR 8000 Series supports up to 4K definition (3840\*2160, effectively four times that of Full HD ) live viewing, playback and recording, providing users with ultra-high-definition video viewing experience.



### RAID 0/1/5/6/10

RAID (Redundant Array of Independent Disks) is a method of combining hard disks as a logical unit to achieve redundancy and greater speed of writing and reading data.

	RAID 0	RAID 1	No. of hard disk drives required	Total Storage Space
RAID 10			4, 6, 8	n/2
RAID 6			≥ 4	n-2
RAID 5			≥ 3	n-1
RAID 1			2	n/2
RAID 0			≥ 2	n

# 4K H.265 Pro NVR 8000 Series




Model			MS-N8032-UH	MS-N8064-UH
Video/Audio Input	Network Video Input		32-CH	64-CH
	Bandwidth	Incoming Outgoing	256Mbps or 200Mbps(when RAID is enabled) 256Mbps or 200Mbps(when RAID is enabled)	320Mbps or 200Mbps(when RAID is enabled) 256Mbps or 200Mbps(when RAID is enabled)
Video/Audio Output	HDMI Output		2-CH, Resolution: 3840x2160/60Hz(HDMI1 Only), 3840x2160/30Hz(HDMI1 Only), 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI Supports Audio Output	
	VGA Output		2-CH, Resolution: 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
	Dual Stream		Support	
	Recording Resolution		12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF	
	Synchronous Playback		4*(30fps @8MP), 5*(30fps @6MP), 6*(30fps @5MP), 8*(30fps @4MP), 10*(30fps@3MP), 16*(30fps@1080P), 32*(30fps@720P)	4*(30fps @8MP), 5*(30fps @6MP), 6*(30fps @5MP), 8*(30fps @4MP), 10*(30fps@3MP), 16*(30fps@1080P), 32*(30fps@720P), 64*(30fps @D1)
Video/Audio Compression	Video Compression		H.265 <sup>+</sup> /H.265(HEVC)/H.264 <sup>+</sup> /H.264	
	Audio Compression		G.711/AAC	
	Sample Rate		8KHz/16KHz	
Storage	SATA		8*SATA HDD (3.5")	
	eSATA		1*eSATA	
	Capacity		Up to 10TB capacity for each HDD	
Disk Array	Array Type		RAID0, RAID1, RAID5, RAID6, RAID10	
Recording Management	Recording Type		Continuous, Motion Detection, Alarm, Smart Event, Event (Motion Detection, Alarm, Smart Event)	
	Snapshot		Manual Snapshot	
	Playback		Video Playback, Image Playback	
Backup	Backup		Video Backup, Image Backup	
Network	Protocol		IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, NTP, SNTP, SMTP, SNMP, UPnP, NFS	
External Interface	Network Interface		2*RJ45 100M/1000M 1*RS-485 Series Port for PTZ	
	Serial Interface		1*RS-232 Series Port for Console 1*RS-485 Series Port for Keyboard	
	USB Interface		1*USB 3.0; 2*USB 2.0	
	Audio Input/Output		1*RCA/2*RCA	
	Alarm Input/Output		16-CH/4-CH	
General	Compatibility		ONVIF	
	Video Analysis		Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting	
	Keyboard Control		Milesight Keyboard (MS-K02)	
	Power Supply		AC 100V~240V 50Hz~60Hz	
	Consumption		≤35W(Without HDD)	
	Working Conditions		Temperature: -10℃~55℃/Humidity: 10%~90%	
	Dimensions		Rack Mountable Chassis (2.0U Standard) 440mm(W)X420mm(D)X88.2mm(H)	
	Weight		6.0Kg	
	Warranty		3/5 Years	

V7.17

# 4K H.265 Pro NVR 8000 Series



## Interfaces

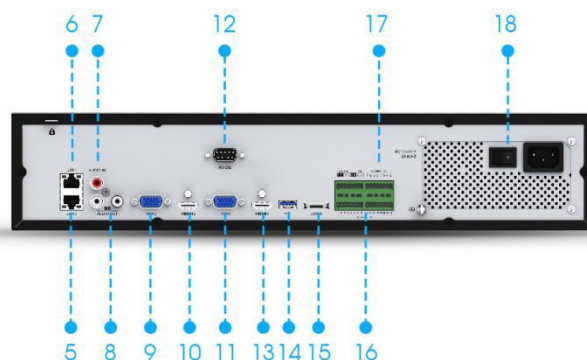

- |                  |                  |          |            |           |         |             |              |
|------------------|------------------|----------|------------|-----------|---------|-------------|--------------|
| 1. Run Indicator | 2. HDD Indicator | 3. USB   | 4. Power   | 5. LAN1   | 6. LAN2 | 7. Audio In | 8. Audio Out |
| 9. VGA2          | 10. HDMI2        | 11. VGA1 | 12. RS-232 | 13. HDMI1 | 14. USB | 15. eSATA   | 16. Alarm In |
| 17. Alarm Out    | 18. Power        |          |            |           |         |             |              |

## Installation of HDDs



Step1



Step2



Step3




Step4



Step5

## Structure Diagrams

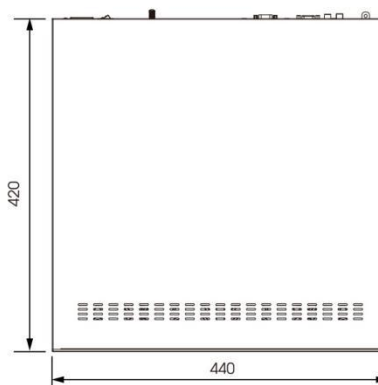

Units: mm

## Naming Convention

MS-N	<u>8</u>	<u>032-</u>	<u>UH</u>
	8*3.5"HDD	032--32-CH (064--64-CH)	4K+H.265

Milesight Technology Co.,Ltd. | [www.milesight.com](http://www.milesight.com)

Contact Us: [sales@milesight.com](mailto:sales@milesight.com) [support@milesight.com](mailto:support@milesight.com)

Add: 220 NE 51st Street, Oakland  
Park, Florida 33334, USA  
Tel: +1-800-561-0485

Add: 925, Anyang SK V1 Center, LS-ro  
116beon-gil, Dongan-gu, Anyang-si, Korea  
Tel: +82-31-990-7772

Add: No.23 Wanghai Road,  
2nd Software Park, Xiamen, China  
Tel: +86-592-5922772

