

PCIe 4-Port 2.5G 4-Speed

Multi-Gigabit Network Adapter

User Manual

Ver. 1.00

**All brand names and trademarks are properties of their
respective owners.**

Contents:

Chapter 1: Introduction	3
1.1 Product Introduction	3
1.2 Features.....	3
1.3 Requirements	4
1.4 Package Contents.....	4
Chapter 2: Getting Started	5
2.1 Hardware Layout	5
2.2 Hardware Installation	6
2.3 Driver Installation.....	7
2.3.1 Installation for Windows.....	7
2.3.2 Installation for Linux	7
2.4 Verifying the installation	8
2.4.1 Verifying for Windows	8
2.4.2 Verifying for Linux	9

Chapter 1: Introduction

1.1 Product Introduction

This card is a high-performance, 4 ports, 4-speed, 2.5 Gigabit Adapter designed for low-power, low-cost connectivity required by application servers, high-end workstations and personal computers.

1.2 Features

- PCIe x4 form factor compatible with x4, x8 and x16 PCI Express slots
- Supports 10/100/1000/2500 Mbps Ethernet
- Supports Preboot eXecution Environment (PXE)
- LED indicators indicate status of link/ activity and speed
- Supports Jumbo Frames up to 9K
- Supports WOL (Only Port 1)

- OS Support: Windows 8.x, 10, 11 (32-bit/64-bit); Linux kernel 3.10 or later

1.3 Requirements

Hardware

The following system specs are recommended minimum

- PCIe slot: Available 4-Lanes PCI-Express slot Gen 4, Gen 3 or Gen 2
- Processor: Quad Core 3.0GHz or higher
- RAM: 4GB memory or higher

Software

Operating systems supported are (both 32 and 64 bits)


- Windows 8.x, 10, 11
- Linux 3.10 or later

1.4 Package Contents

- 1 x PCIe 4-Port 2.5G 4-Speed Multi-Gigabit Network Adapter
- 1 x User Manual

Chapter 2: Getting Started

2.1 Hardware Layout

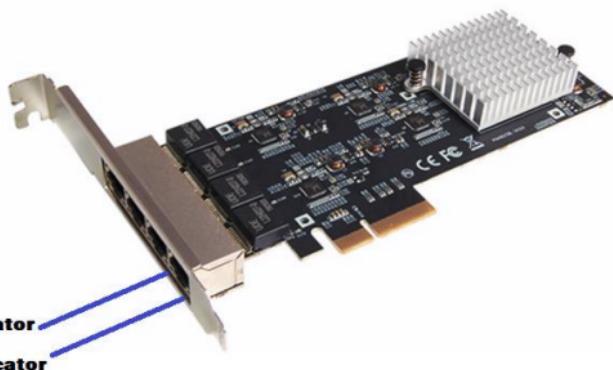

Link/Activity Indicator:

LED	Description
Link Speed LED	Indicates Link Speed: <ul style="list-style-type: none">• Solid Amber = 2.5Gbps• Solid Green = 1000Mbps• Off = 100/10Mbps
Link /Activity LED	Indicates Network Card Activity: <ul style="list-style-type: none">• Solid Green = Network port is connected• Flashing Green = Network port is active

2.2 Hardware Installation

1. Turn off the power to your computer.
2. Unplug the power cord and remove your computer's cover.
3. Remove the slot bracket from an available PCIe slot.
4. To install the card, carefully align the card's bus connector with the selected PCIe slot on the motherboard. Push the board down firmly.
5. Replace the slot bracket's holding screw to secure the card.
6. Secure the computer cover and reconnect the power cord.

2.3 Driver Installation

The following section shows you how to install PCIe 2.5G 4-Speed Multi-Gigabit Network Adapter driver on different operating systems.

2.3.1 Installation for Windows

1. Go to URL <http://www.sunrichtech.com.hk/>
2. Search N-810, download the driver.
3. Follow the on-screen instructions to finish installing the driver.

2.3.2 Installation for Linux

1. Go to URL <http://www.sunrichtech.com.hk/>
2. Search N-810, download the driver.
3. Follow Readme.txt which is in the driver folder to finish installing the driver.

2.4 Verifying the installation


2.4.1 Verifying for Windows

1. Click on the “Device Manager” tab in the Windows Control Panel.

Start > Control Panel > Device Manager



2. Expand "Network adapters", you can read “Intel(R) Ethernet Controller I255-V” in the Device Manager.

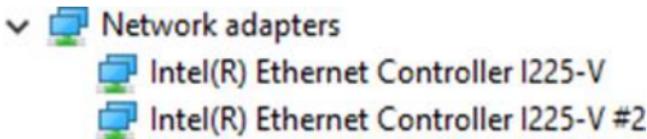

2.4.2 Verifying for Linux

1. Verify ethernet interface appears:

```
ifconfig
```

If no new interface appears, check dmesg output.

2. Assign an IP address to the interface by entering the following, where X is the PCIe interface number:

```
ifconfig enpXs0 <IP_address> netmask <netmask>
```

3. Verify that the interface works. Enter the following, where <IP_address> is the IP address for another machine on the same subnet as the interface that is being tested:

```
ping <IP_address>
```