

AEROHEX


USER MANUAL

1. Specifications
2. Chassis Parts
3. Control Panel Functions
4. 3.5"/2.5" HDD/SSD Installation
5. Cooling System Installation
6. Fan Installation
7. RGB Lighting Switching

Specifications


Model	
Model Name:	AEROHEX
Model Number:	CSAZ-203A03
Specifications	
Type:	ATX Mid Tower
Color:	Black
Side Panel Window:	Left side panel: Tempered glass with metal mounts
Max Cpu Cooler Height:	UP to 160mm
Max Video Card Length:	Up to 320mm long video card
Power Supply:	Not included
Motherboard Compatibility:	ATX · Micro ATX · ITX
Expansion	
External 5.25" Drive Bays:	0
Internal 2.5" Drive Bays:	Up to 4
Internal 3.5" Drive Bays:	Up to 1
Expansion Slots:	7
Top ports:	Power button / LED button / HD Audio / USB 3.0 x 1 / USB 2.0 x1 / Type C x 1
Physical Specifications	
Case Dimension (HxWxD):	454 x 203.5 x 377mm / 17.9 x 8 x 14.8 inches
Weight:	5.93Kg /13.07lbs
Features	
Tempered Glass Sides Window:	High-quality tempered glass side window allows for clear visuals to inner components
Addressable RGB Light Effects:	ARGB fans are controlled using the LED button. All addressable RGB devices can sync with the motherboard, allowing the motherboard software to control lighting directly.
Available Fan Ports:	3x120mm fan ports in the front (3x120mm LFO-6112D addressable ARGB fan included) 2x120 or 2x140mm fan ports on the top 1x120mm fan port in the rear (1x120mm LFO-6112D addressable ARGB fan included)
Water Cooling:	Supports radiators up to 240mm on the Top Supports radiators up to 360mm in the Front
Dust Filters:	Removable (magnetic) dustproof net on the top and Front , removable dust filter on bottom of chassis.
Power Supply Support:	Bottom mounted ATX power supply

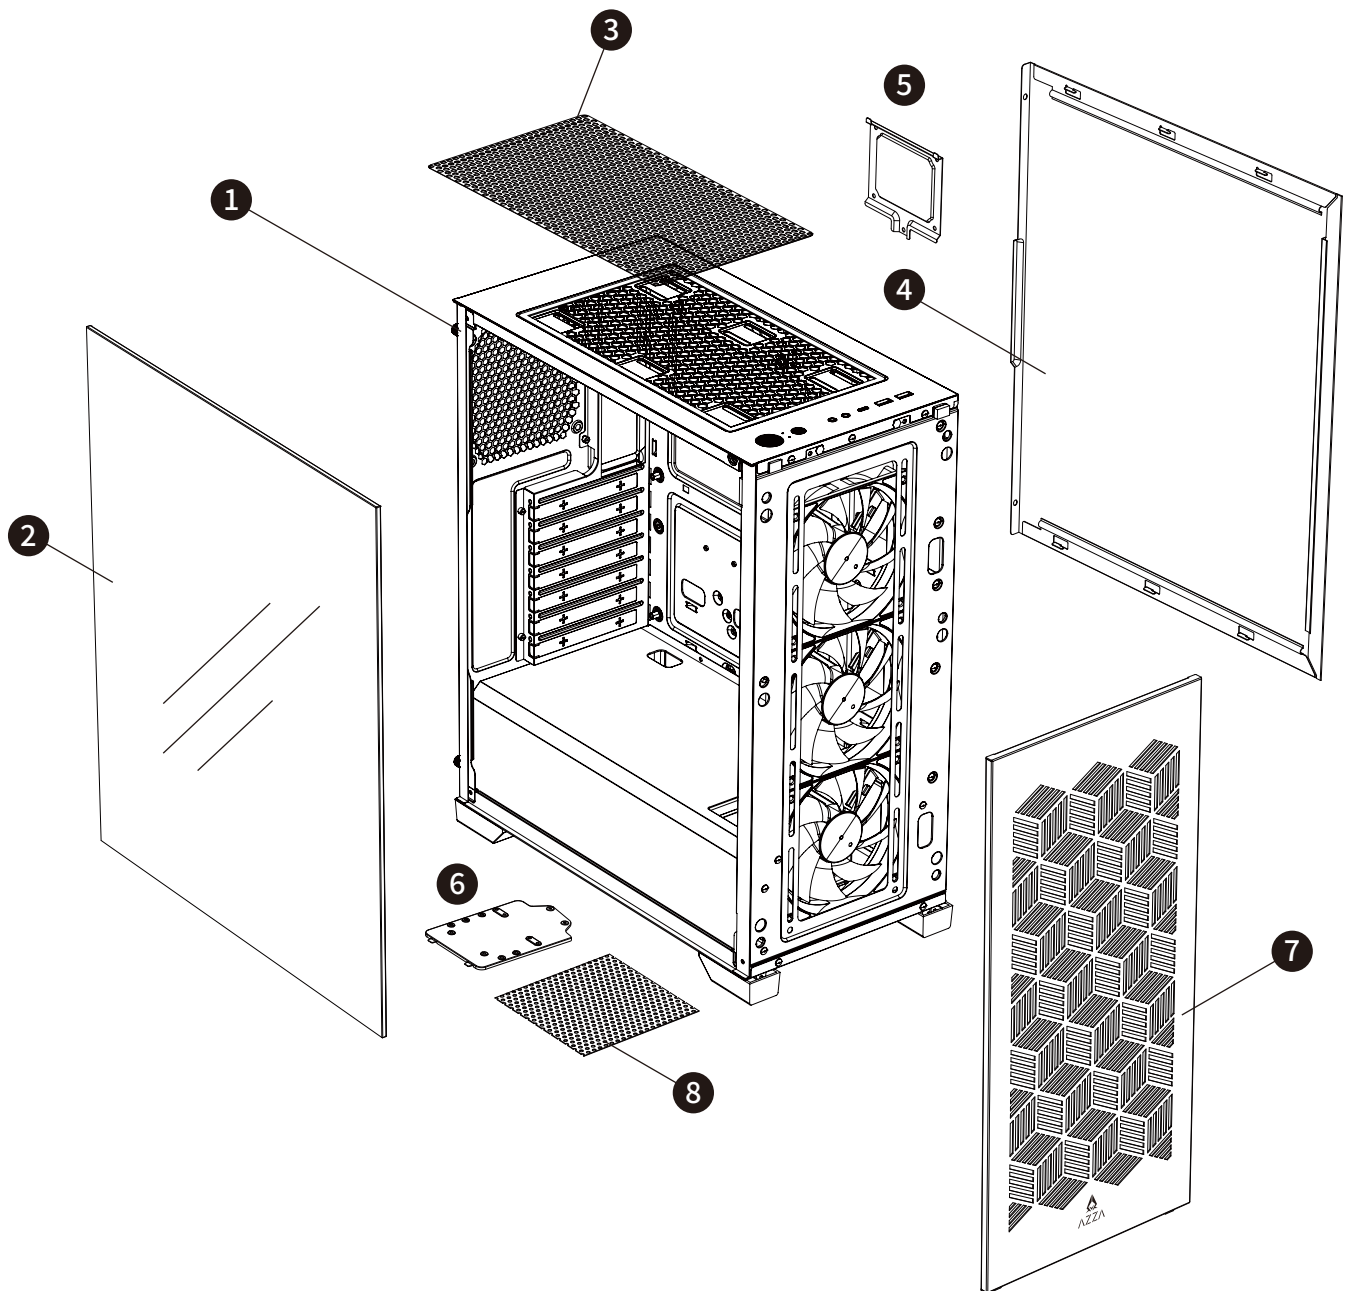


Chassis Parts



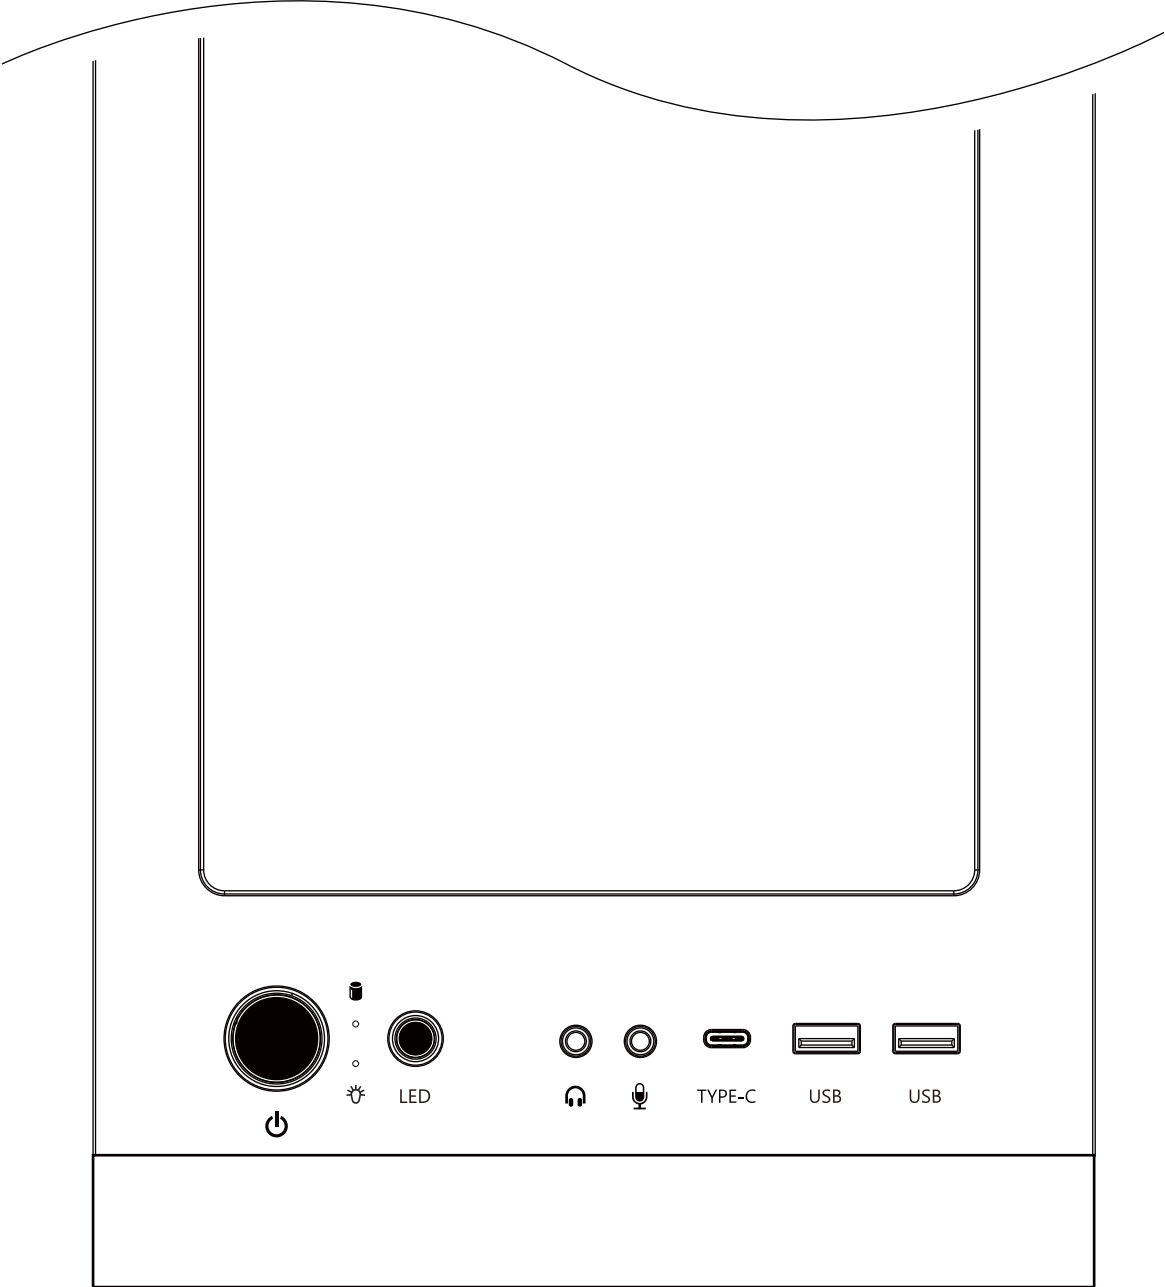


1	Chassis
2	Tempered glass panel
3	Removable magnetic mesh
4	Metal side panel
5	2.5"SSD metal base
6	3.5"HDD/2.5"SSD metal tray
7	Front panel
8	Dust filter on bottom


Control Panel Functions




	POWER
	LED
	HD Audio

	USB2.0
	USB3.0
	Type C



3.5"/2.5" HDD/SSD Installation

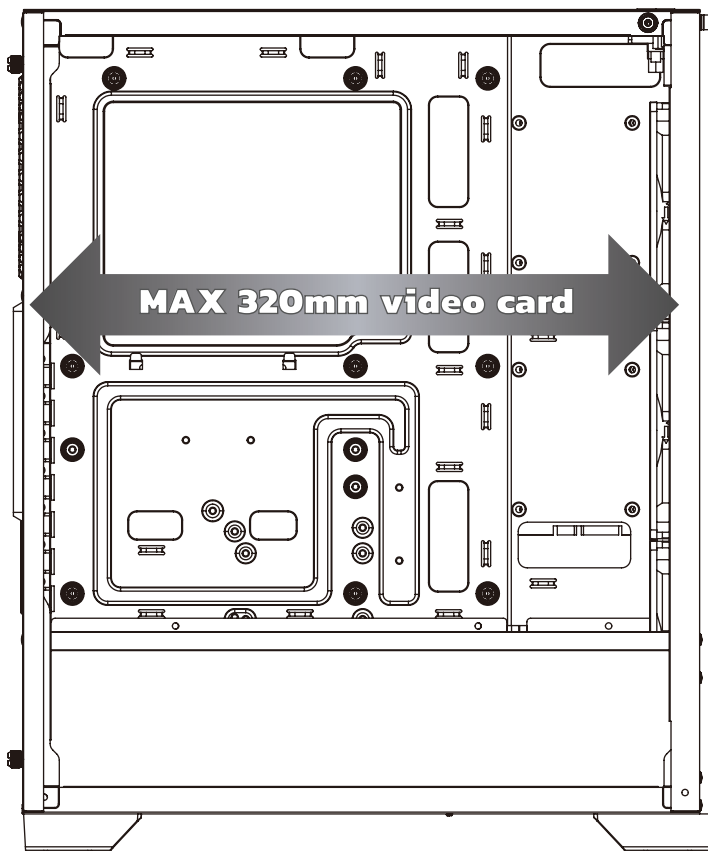

Up to 320mm long video card




or

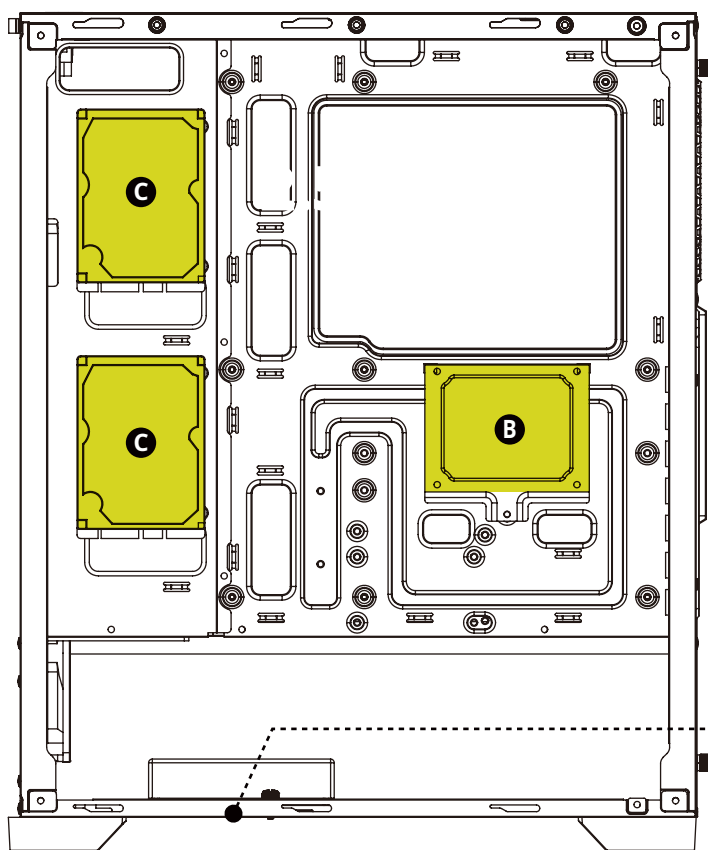




Multifunctional hard disk bracket supports
3.5" HDD or 2.5" SSD x1 (A)

2.5" SSD metal tray supports
2.5" SSD x1 (B)

2.5" SSD metal base supports
2.5" SSD x2 (C)





Front

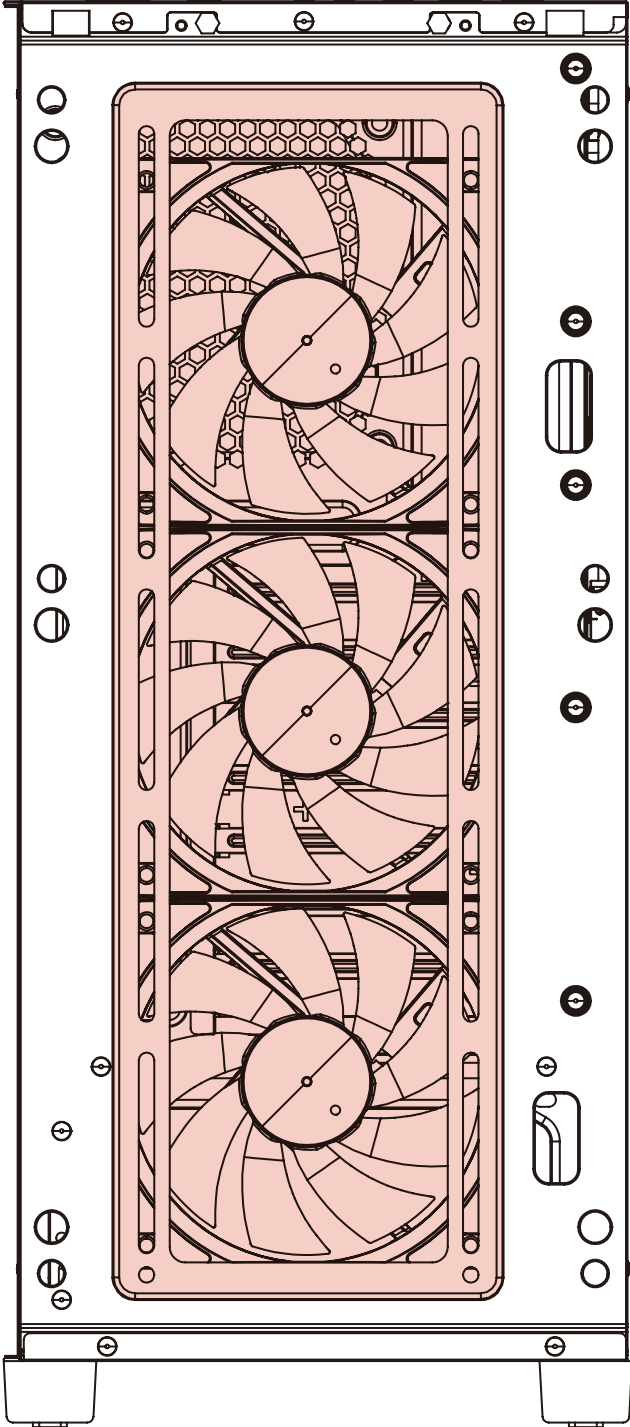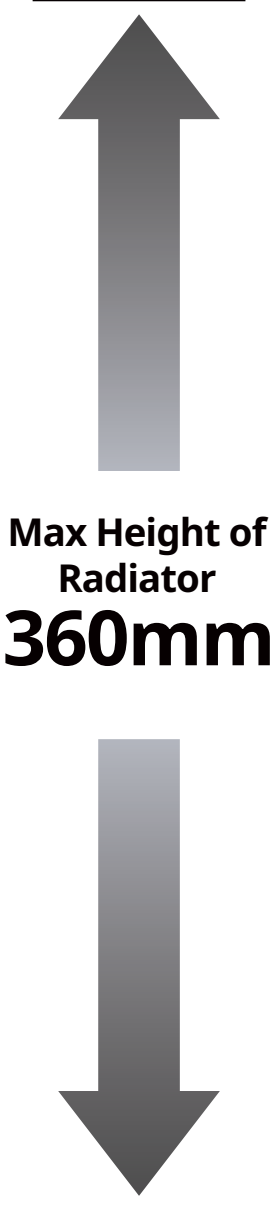


120mm x3

Rear

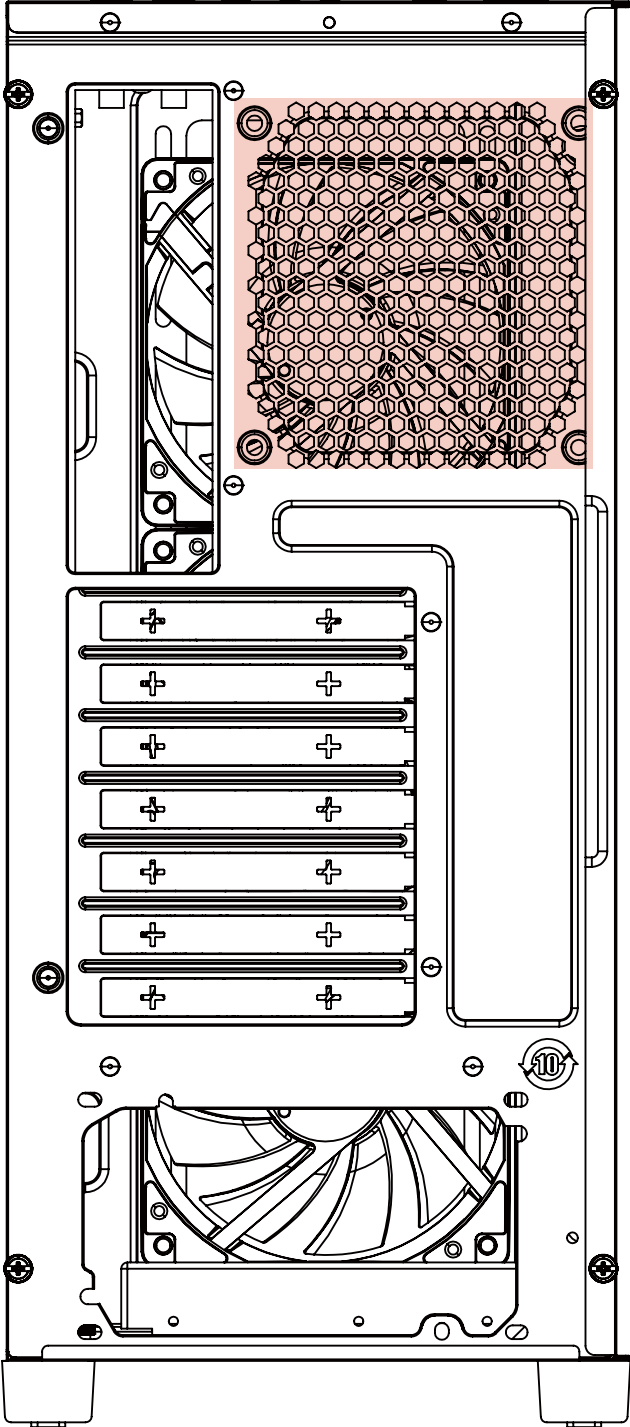


120mm x1

Top





or




120mm x2

140mm x2

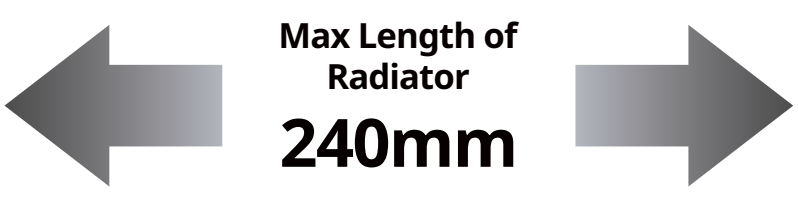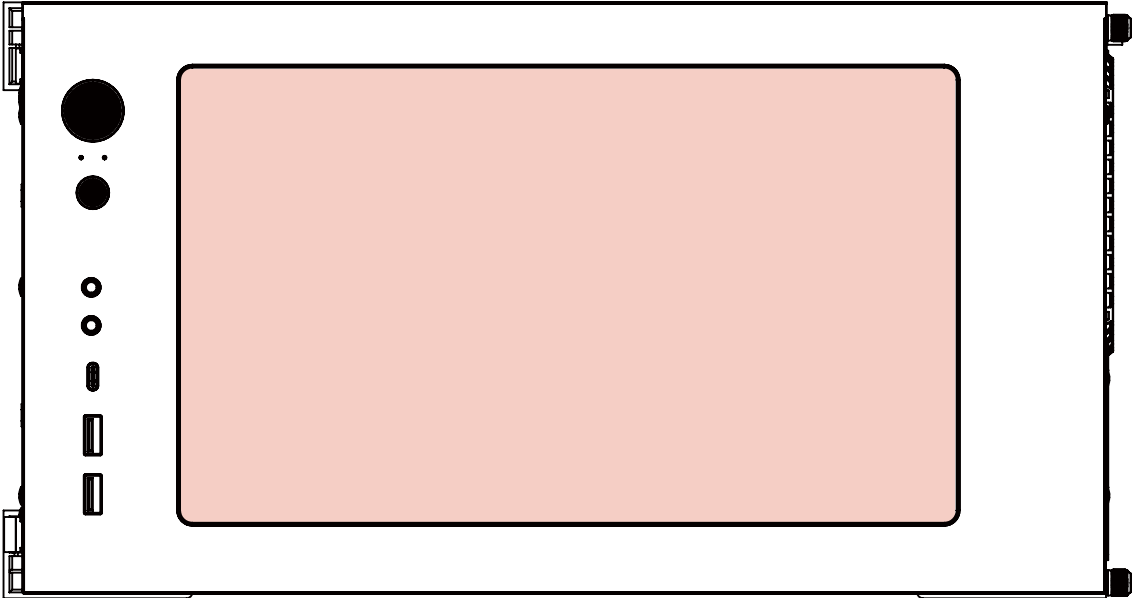


Fan Installation





120mm x2


or



140mm x2

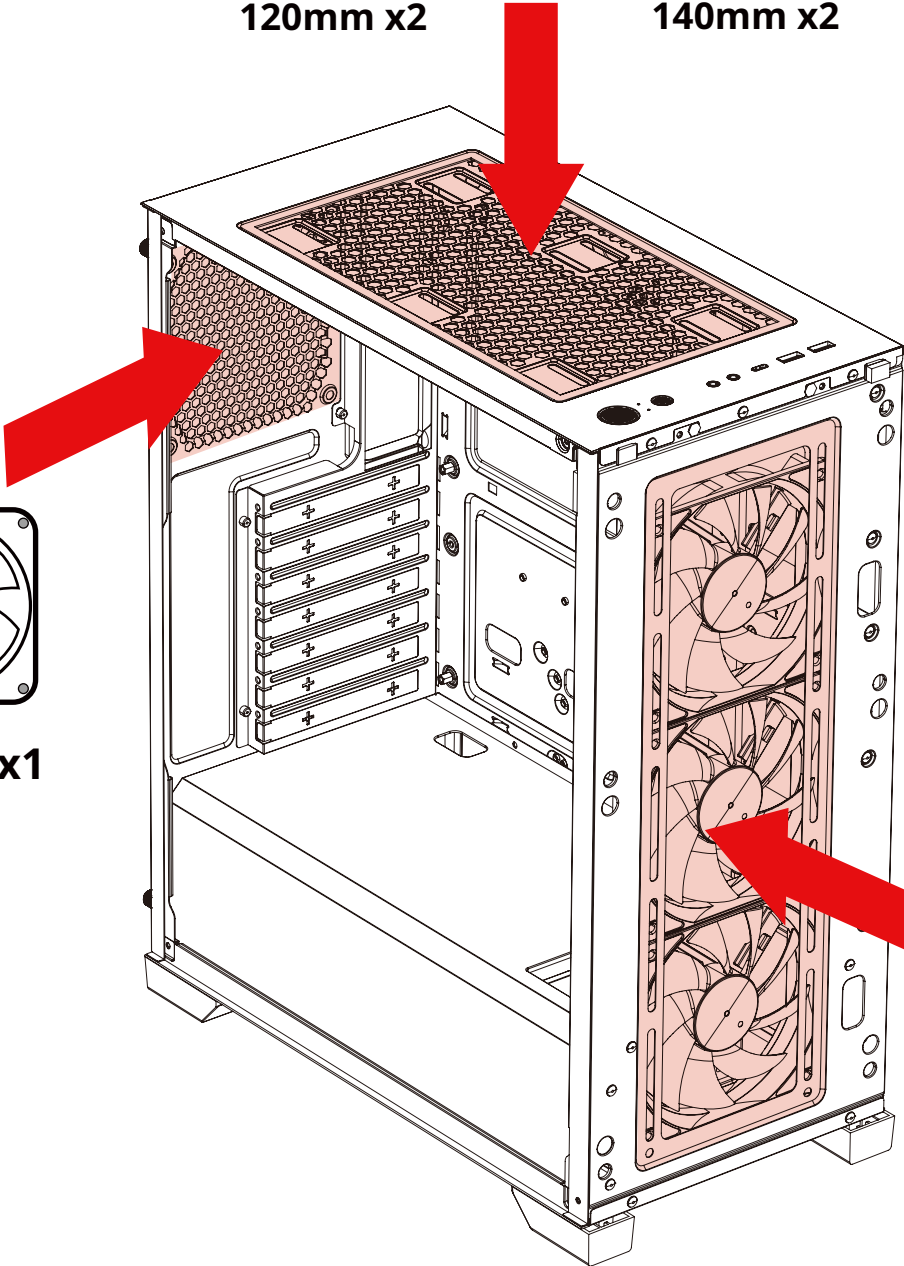


120mm x1



120mm x3

3x120mm fan ports
in the front

Fan Installation

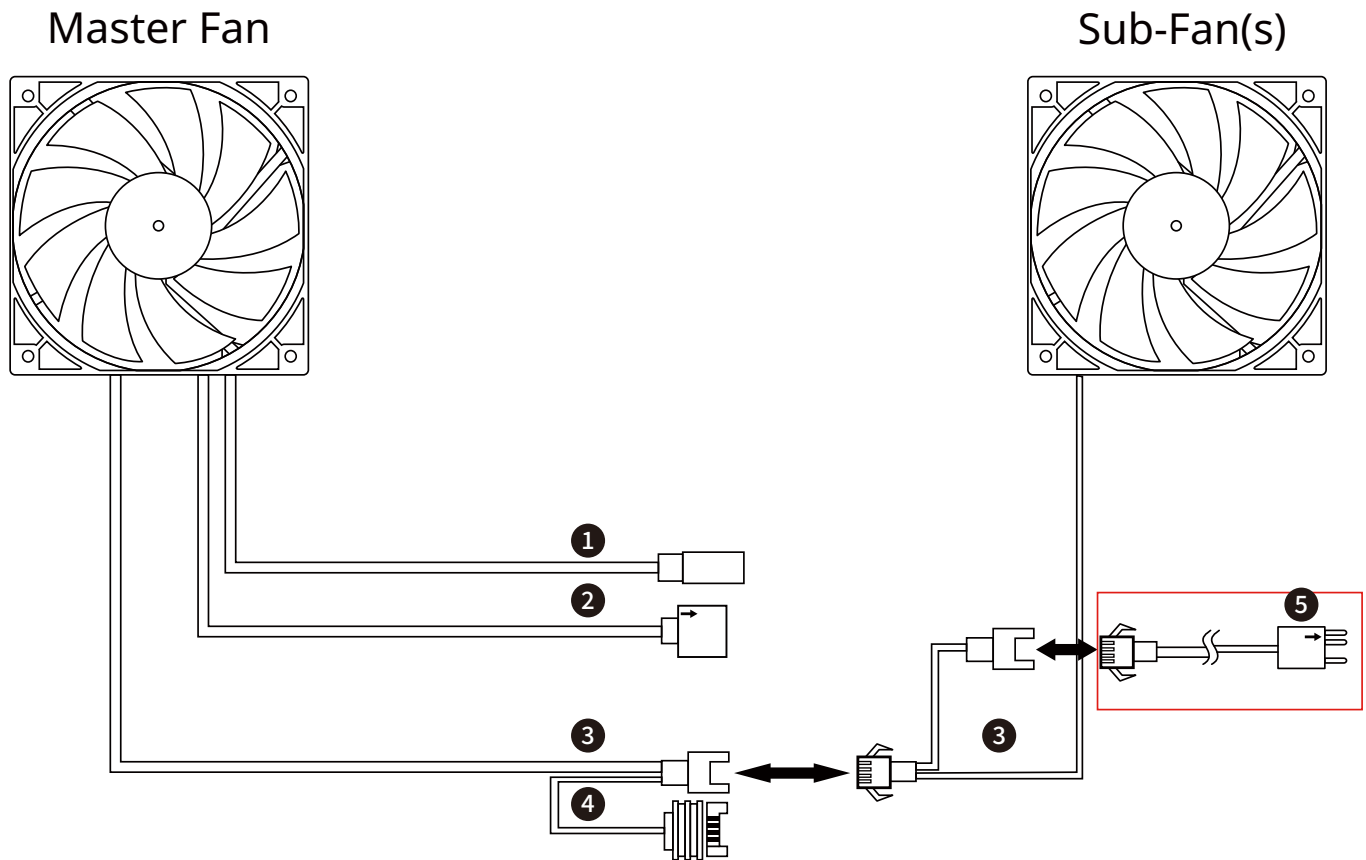

	CONNECTOR	CONNECTION
①	Reset(LED) S/W (2pin)	LED Button
②	ARGB LED 5V (3pin) female connector	The 5V/3pin ARGB socket of the motherboard
③	Fan Connector	The master Fan connect to the sub-fan
④	SATA	Power Supply
⑤	ARGB LED 5V (3pin) male connector	Other 5V/3pin ARGB devices

- ※ Before the fan starts, please make sure the SATA connector ④ is connected.
- ※ Press the LED button to cycle through different RGB lighting modes, all ARGB devices are controlled by the LED button. (make sure the other 3pin ARGB device is connected with ⑤)
- ※ Ensure ② insert the motherboard, and hold the LED button for 3 seconds to switch the RGB control function to the motherboard RGB sync. software. Press the LED button for 3 second, to switch in sixteen individual RGB LED modes and controlled by the LED button.

RGB Lighting Switching

Press the LED button to cycle through different RGB lighting modes.

