






PR750ELCD/PR1000ELCD  
PR1500ELCD



### PROFESSIONAL UPS TO SAFEGUARD IT EQUIPMENT



### The professional UPS with Automatic Voltage Regulation to stabilize the AC power output for business applications

Designed for computer room and server room applications, the Professional Tower Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output with Pure Sine Wave to ensure high power quality. The products are also compatible with power management software to easily control and monitor the UPS system.


#### SERIES FEATURES

- Line-interactive UPS Topology
- Energy Saving Technology
- Active PFC Compatible
- Pure Sine Wave Output
- Automatic Voltage Regulation (AVR)
- Overload Protection
- Critical/Non-critical Load Outlets\*
- Hot-swappable Batteries
- Surge and Spike Protection
- EMI and RFI Filtration
- LCD Status Display
- Detachable LCD Panel
- USB Connectivity Port
- Emergency Power Off (EPO) Port
- PowerPanel Management Software
- SNMP/HTTP Remote Management Capability (Optional)

\*Selected Model(s)

#### PRODUCT CALLOUTS

1. Power On Indicator
2. Power On/Off Switch
3. LCD Display Panel
4. Function Button(s)
5. Battery Backup & Surge Protected Outlets
6. Input Circuit Breaker
7. AC Inlet
8. Serial Port
9. USB Port
10. SNMP/HTTP Network Slot
11. EPO Port

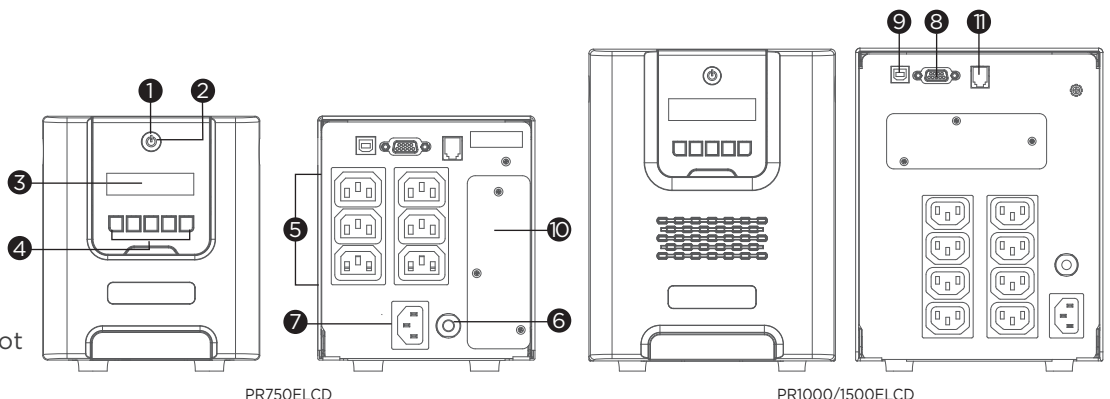



## TECHNICAL SPECIFICATIONS

Model Name	PR750ELCD	PR1000ELCD	PR1500ELCD
<b>General</b>			
UPS Topology	Line-interactive		
Energy Saving Technology	GreenPower UPS™ Bypass Technology		
Active PFC Compatibility	Yes		
<b>Input</b>			
Nominal Input Voltage (Vac)	230		
Input Voltage Range (Vac)	151 - 301		
Input Frequency (Hz)	50 ± 3, 60 ± 3		
Input Frequency Detection	Auto-sensing		
Rated Input Current (A)	10		
Input Connector Type	IEC C14		
<b>Output</b>			
Capacity (VA)	750	1000	1500
Capacity (Watts)	675	900	1350
On Battery Waveform	Pure Sine Wave		
On Battery Voltage(s) (Vac)	230 ± 5%		
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%		
Power Factor	0.9		
Automatic Voltage Regulation (AVR)	Double Boost, Single Buck		
Overload Protection	Internal Current Limiting		
Outlet(s) - Total	6	8	
Outlet Type	IEC C13 x 6	IEC C13 x 8	
Outlet(s) - Battery & Surge Protected	6	8	
Outlet(s) - Critical Load (CL)	-	4	
Outlet(s) - Non-critical Load (NCL)	-	4	
Typical Transfer Time (ms)	4		
<b>Battery</b>			
Runtime at Half Load (min)	10.5	16	17
Runtime at Full Load (min)	2.5	4	
Typical Recharge Time (Hours)	8		
User-replaceable	Yes		
Hot-swappable	Yes		
Battery Type	Sealed Lead-acid		
Replacement Battery Pack (RBP)	RBP0014	RBP0106	RBP0023
Replacement Battery Pack (RBP) Quantity (pcs)	1		
<b>Surge Protection &amp; Filtering</b>			
Surge Suppression (Joules)	405		
EMI/RFI Filtration	Yes		
<b>Management &amp; Communications</b>			
LCD Panel	Yes		
LCD Types	Detachable LCD Panel		
HID Compliant USB Port(s)	1		
Serial Port	Combo (RS232 + Dry Contact)		
Emergency Power Off (EPO) Port	Yes		
Power Management Software	PowerPanel Business (Recommended)		
SNMP/HTTP Remote Monitoring	Yes - with optional RMCARD205		
<b>Physical</b>			
Form Factor	Tower		
<b>Physical Size - UPS Module</b>			
Dimensions (WxHxD) (mm.)	138 x 162 x 349	170 x 221 x 432	
Weight (kg.)	12.3	18.9	25.1
<b>Environmental</b>			
Operating Temperature (°C)	0 - 40		
Operating Relative Humidity (Non-condensing) (%)	0 - 95		
Online Thermal Dissipation (BTU/hr)	75	102	113
Fanless Design	Yes - virtually no noise	-	
<b>Certifications</b>			
Certifications*	CE, EAC, RCM		
RoHS	Yes		

\*Certifications may vary according to different regions. Visit [www.cyberpower.com](http://www.cyberpower.com) for more information.  
#All specifications are subject to change without notice.