# Omada Pro L3 Managed Switch Datasheet

## S6500-48MPP6Y

Omada Pro 48-Port 2.5G Stackable L3 Managed PoE++ Switch with 6 25G Slots

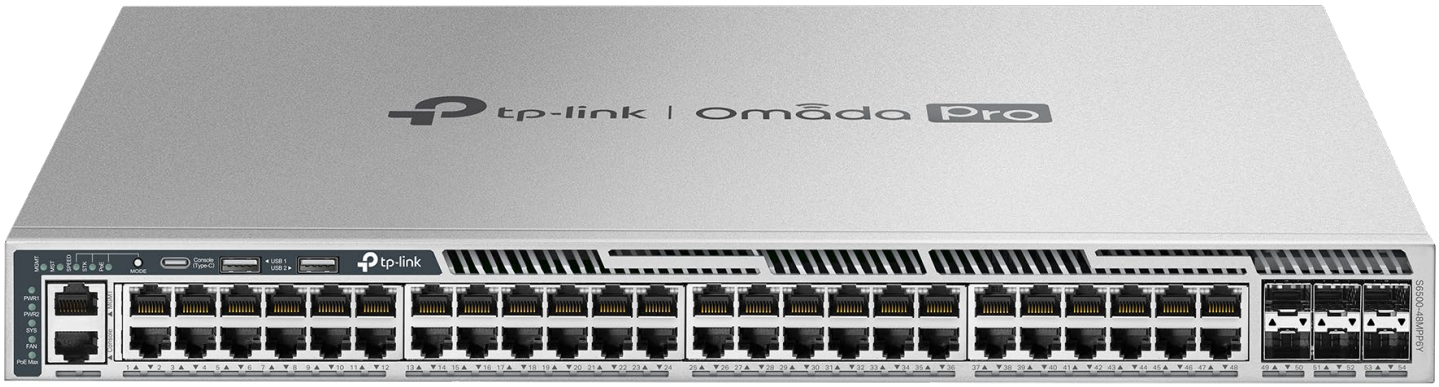

## Highlights

- 48× 2.5 Gbps PoE++ RJ45 ports (up to 60 W PoE out per port)
- 6× 25 Gbps SFP28 slots
- Up to 1484 W total PoE budget*
- Physical stacking for built-in redundancy and performance
- M-LAG improve link reliability from the card level to the device level.
- L3 Features: OSPF, BGP, IS-IS, VRRP, VRF, PIM-SM/PIM-DM/PIM-SSM, ECMP, PBR, PTPv2
- Security Strategies: MACsec, Secure Boot, RADSEC, IMPB, SFTP, 802.1X, Port Security
- Highly available with two field-replaceable power supplies,** VRRP, ERPS, and BFD
- Easy O&M: NETCONF, Configuration Rollback, Hot Patching, and RSPAN
- Centralized cloud management via the web or the Omada app†

# Product Pictures

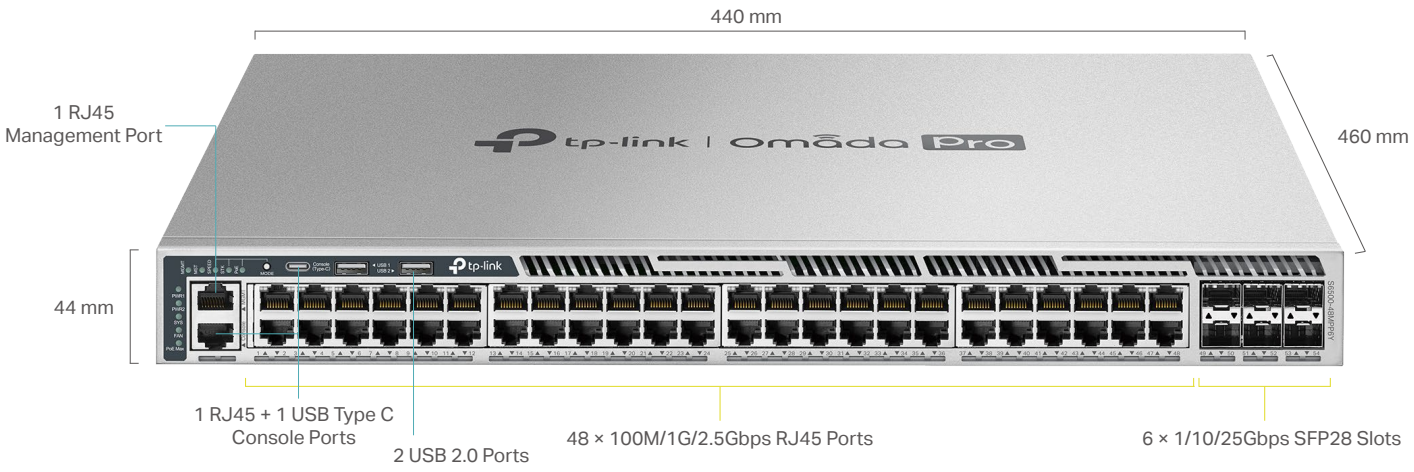


# Omada Pro Solution

Omada Pro is an intelligent cloud solution for enterprise networking, offering enterprise-grade product line designed to meet the high-capacity, security, and management needs of various industries, such as MDUs, hospitality, K-12 education, public works, and more.

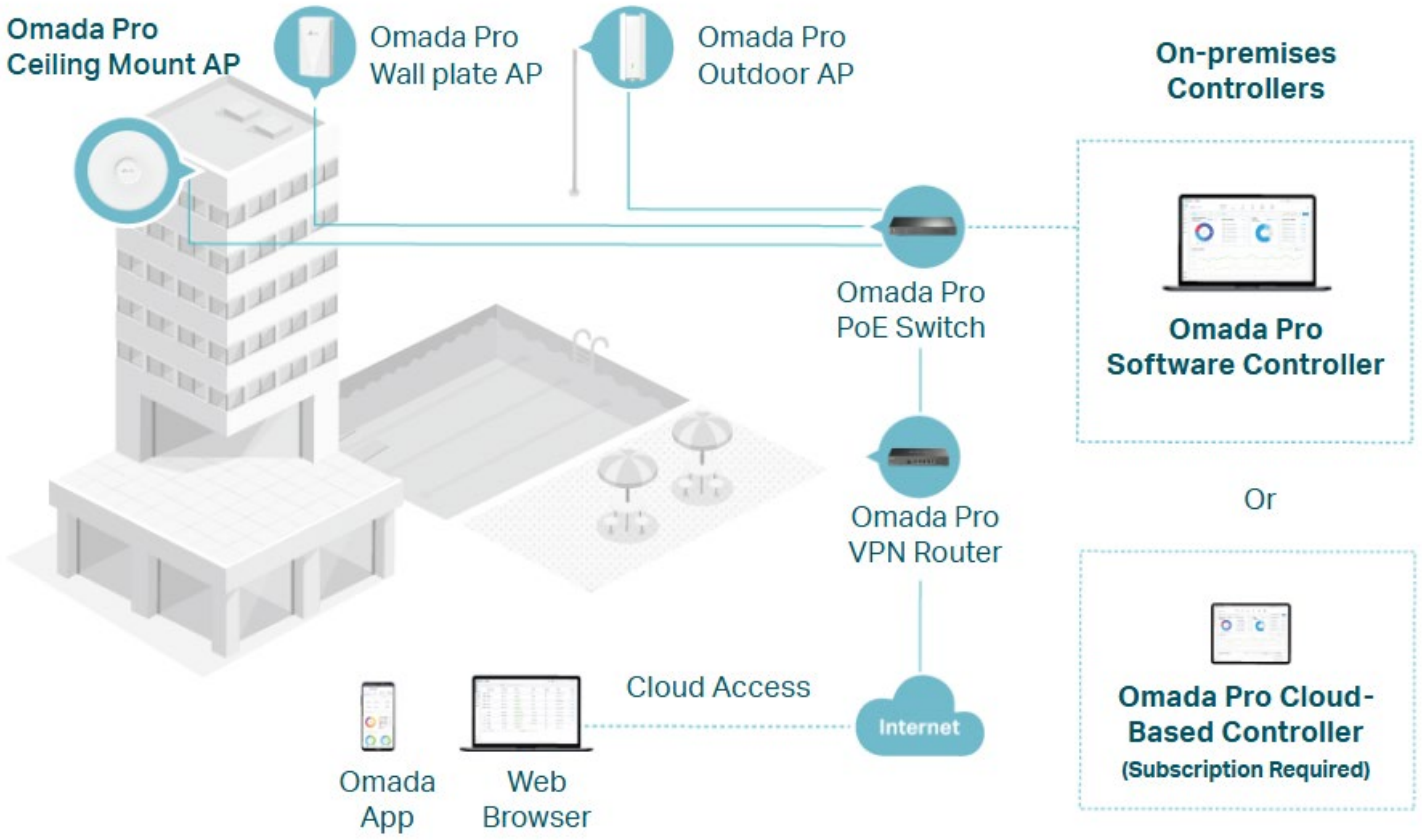


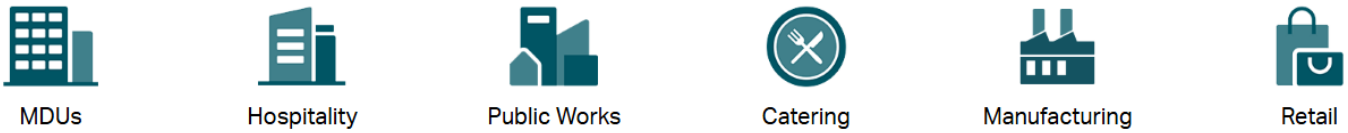

# Specifications

## Hardware Features & Performance

| Model | | S6500-48MPP6Y |
|---|---|---|
| General | Interface | 48 × 100M/1G/2.5Gbps RJ45 Ports<br>6 × 1/10/25Gbps SFP28 Slots* |
| | Console Ports | 1 × RJ45 + 1 × USB Type C |
| | Management Port | 1 × RJ45 |
| | USB Ports | 2 × USB 2.0 |
| | Flash | 2×4 MB Nor + 8 GB EMMC |
| | DRAM | 4GB DDR4 |
| | Processor | Dual-Core ARM @1.5GHz CPU |
| PoE | PoE Standard | IEEE 802.3af/at/bt |
| | PoE Ports | 48, max 60W/port |
| | PoE Power Budget | 701 W (with 1*PSM900-AC, by default)<br>328 W (with 1*PSM500-AC)<br>752 W (with 2*PSM500-AC)<br>1118 W (with 1*PSM500-AC and 1*PSM900-AC)<br>1484 W (with 2*PSM900-AC) |
| | Fast PoE | Yes |
| | Perpetual PoE | Yes |
| Performance | Switching Capacity | 540 Gbps |
| | Forwarding Bandwidth | 270 Gbps |
| | Packet Forwarding Rate | 401.7 Mpps |
| | MAC Address Table | 32 K |
| | Packet Buffer | 3 MB |
| | Stacking Port | 25G SFP28 slot (all uplink ports can be used as stacking ports)** |
| | Stacking Bandwidth | Up to 300 Gbps (6 stacking ports) |
| | Max Stacking Number | 12 in standalone mode, 4 in Omada controller mode |
| | Compatible Models for Stacking | S6500-24M4Y, S6500-24MPP4Y, S6500-48M6Y, S6500-48MPP6Y |
| | Transmission Method | Store and Forward |
| | Jumbo Frame | 9 KB |
| Physical & Environmet | Power Supply | 100-240 V ~50/60 Hz |
| | Redundant Power Supply | Max 2 hot swappable power supply module, N+1 redundant (shipping with one PSM900-AC module by default)*** |
| | Suitable Power Supply Module | PSM500-AC, PSM900-AC |
| | Max Power Consumption | 142.2 W (110 V/60 Hz) (With no PD connected)<br>1,887.4 W (110 V/60 Hz) (With 1484W PD connected and powered by 2× PSM900-AC) |
| | Max Heat Dissipation | 484.9 BTU/hr (110 V/60 Hz) (With no PD connected)<br>6,436.03 BTU/hr (110 V/60 Hz) (With 1484W PD connected and powered by 2× PSM900-AC) |
| | Standby Power Consumption | 88.8 W (220 V/50 Hz) |
| | Noise | 1× PSM900-AC power supply module: Min: 36.4 dBA @1m 25 °C<br>Max: 60.5 dBA @1m 25 °C<br>2× PSM900-AC power supply modules: Min: 39.9 dBA @1m 25 °C<br>Max: 63.8 dBA @1m 25 °C |
| | Fan Quantity | 4 hot swappable fan modules<br>N+1 redundant |
| | Airflow | Front-to-back |
| | Surge Protection | Service port: ±6 kV in common mode<br>Power port: ±6 kV in differential mode; ±6 kV in common mode |
| | ESD Protection | Air: ±15 kV, Contact: ±8 kV |
| | MTBF | 594,101 h @ 25 °C |
| | Dimensions (W x D x H) | 17.3 × 18.1 × 1.7 in (440 × 460 × 44 mm) |
| | Installation | Rackmount |
| | Operating Temperature & Altitude | -5 °C to 45 °C (23 °F to 113 °F) @ 2,000 meters<br>-5 °C to 40 °C (23 °F to 104 °F) @ 3,000 meters |
| | Storage Temperature | -40 °C to 70 °C (-40 °F to 158 °F) |
| | Operation Humidity | 10% to 90% RH, non-condensing |
| | Storage Humidity | 5% to 90% RH, non-condensing |
| | Certification | CE, FCC, RoHS |

*No more than two 10G RJ45 SFP+ modules are supported, and they can only be inserted into slots 49&53.
**The 25G SFP28 slots support stacking only through 25G DAC/25G SFP28 modules rather than 10G DAC/10G SFP+ modules.
***An additional power supply module needs to be purchased separately.

## Software Features[Δ]

| Model | | S6500-48MPP6Y | |
|---|---|---|---|
| System | System Info | • Device Description<br>- Name<br>- Location<br>- System Contact<br>• System Time<br>- Manual<br>- Synchronize with PC's Clock<br>- SNTP Client<br>• DST<br>- Predefined Mode<br>- Recurring Mode<br>- Date Mode | • LED<br>- LED on/off<br>• System IP<br>- Static IP/DHCP/BOOTP<br>• System IPv6<br>- Link-local Address Config<br>- Global Address Autoconfig via RA Message<br>- Global Address Autoconfig via DHCPv6 Server<br>- Add a Global Address Manually |
| | User Management | • User Settings<br>• Access Level: 4 levels | • Password Recorvery Settings |
| | System Tools | • Config Restore/Backup<br>- Web: HTTP<br>- CLI: TFTP/Flash/USB<br>• Firmware Upgrade<br>- Web: HTTP<br>- CLI: TFTP/Flash/USB | • System Reboot<br>• System Reset<br>• Boot Config (Dual Image)<br>• Reboot Schedule<br>• Config Rollback<br>• Hot Patch |
| | Access Security | • Access Control Config<br>- IP-based<br>- MAC-based<br>- Port-based<br>- IPv6-based<br>• HTTP Config<br>- Enable/Disable<br>- Session Config<br>- Access User Number<br>- Port Setting<br>• SSL Config<br>- SSLv3/TLSv1 Enable/Disable<br>- CipherSuite Config<br>- IPv6 SSL | • SSH Config<br>- Enable/Disable<br>- v2<br>- Encryption Algorithm<br>- Data Integrity Algorithm<br>- Port Setting<br>- IPv6 SSH<br>• Telnet Config<br>- Enable/Disable<br>- Port Setting<br>- IPv6 Telnet<br>• Console Port<br>- Baud Rate setting |
| | Stack | • Stack Setting<br>• Stack-port LAG: up to 6 groups, each group supports a maximum of all stackable-ports<br>• Stackable Devices: up to 12 devices | • Stack MAC Address Switching Delay<br>• Multi-active Detection (MAD)<br>• Virtual MAC |
| | M-LAG | • M-LAG domain configuration<br>• Dual-Active Detection<br>• M-LAG Config Consistency Check | • Peer-link-port LAG: 1 Group, each group supports a maximum of all peerLinkable-ports<br>• M-LAG Member Interface MAC Address Switching Delay |
| | SDM Template | • Default Template<br>- IPv4 ACL Rules: 300 entries<br>- MAC ACL Rules: 300 entries<br>- Combined ACL Rules: 300 entries<br>- IPv6 ACL Rules: 0 entries<br>- IPv4 Source Guard: 299 entries<br>- IPv6 Source Guard: 0 entries<br>• IPv4 Access<br>- IPv4 ACL Rules: 0 entries<br>- MAC ACL Rules: 300 entries<br>- Combined ACL Rules: 500 entries<br>- IPv6 ACL Rules: 0 entries<br>- IPv4 Source Guard: 499 entries<br>- IPv6 Source Guard: 0 entries<br>• IPv6 Access<br>- IPv4 ACL Rules: 0 entries<br>- MAC ACL Rules: 200 entries<br>- Combined ACL Rules: 0 entries<br>- IPv6 ACL Rules: 250 entries<br>- IPv4 Source Guard: 0 entries<br>- IPv6 Source Guard: 249 entries | • Omada<br>- IPv4 ACL Rules: 0 entries<br>- MAC ACL Rules: 0 entries<br>- Combined ACL Rules: 600 entries<br>- IPv6 ACL Rules: 150 entries<br>- IPv4 Source Guard: 0 entries<br>- IPv6 Source Guard: 0 entries<br>• Extra<br>- IPv4 ACL Rules: 600 entries<br>- MAC ACL Rules: 800 entries<br>- Combined ACL Rules: 600 entries<br>- IPv6 ACL Rules: 300 entries<br>- IPv4 Source Guard: 0 entries<br>- IPv6 Source Guard: 0 entries |
| | Time Range | • Time Range Config | • Holiday Config |
| | PTP | • Profile: IEEE 1588v2 (PTPv2), IEEE 802.1AS | • Clock-type: oc, bc, e2etc, p2ptc |
| | File System | • File Operation<br>• FTP<br>• SFTP | • SCP<br>• TFTP<br>• USB Storage |

## Software Features[△]

| Model | | S6500-48MPP6Y | |
|---|---|---|---|
| L2 Features | Port | • Auto Negotiation/Auto MDI/MDIX<br>• Port config<br>- Status<br>- Speed and Duplex<br>- Flow Control(802.3x)<br>- Jumbo Frame: 1518-9216 KB<br>• Port Mirror<br>- Ingress (Many to One)<br>- Egress (Many to One)<br>- RSPAN | • Port Security<br>- Learn mode: Dynamic/Static/Permanent/Sticky<br>- Port Max Learned MAC: 64<br>- Current Learned Number<br>- Status<br>- Exceed Max Learned Trap<br>• Port Isolation<br>• Loopback Detection<br>- Alert<br>- Port Based<br>- VLAN Based |
| | DDM | | |
| | LAG | • Hash Algorithm: SRC MAC/DST MAC/SRC MAC + DST MAC/SRC IP/DST IP/SRC IP + DST IP | • Static LAG: Up to 64 groups, up to 8 ports per group<br>• LACP(802.3ad) |
| | Traffic Monitor | • TX Packets/Bytes<br>• RX Packets/Bytes<br>• TX Unicast/Multicast/Broadcast<br>• RX Unicast/Multicast/Broadcast | • TX Errors<br>• RX Errors<br>• RX Packet Size Analysis |
| | MAC Address | • MAC Address Table: 32K entries<br>• IVL/SVL: IVL<br>• Create Static Unicast Address | • Bind Dynamic Address<br>• Create Filtering Address<br>• MAC Notification Settings |
| | VLAN | • 802.1Q VLAN(802.1q): 4K VLANs<br>• MAC VLAN: 200 entries<br>• Protocol VLAN<br>- 16 Protocol VLAN Template<br>- 12 Protocol VLAN Group | • QinQ(VLAN VPN): 256 entries<br>• Private VLAN<br>• GVRP |
| | L2 Multicast | • Max Multicast Groups: 4K (IGMP Snooping & MLD Snooping & MVR)<br>• IGMP Snooping<br>- IGMP V1/V2/V3<br>- Report Message Suppression<br>- Fast Leave<br>- Unknown Multicast Discard<br>- Static Multicast Groups<br>- IGMP Snooping Querier<br>- IGMP Packet Statistics<br>- IGMP Authentication<br>- Multicast Filtering: 256 profiles and 16 entries per profile<br>- Router Port Setting: Static Router Port/Forbidden Router Port<br>• MVR | • MLD Snooping<br>- MLD V1/V2<br>- Report Message Suppression<br>- Unknown Multicast Discard<br>- Fast Leave<br>- Static Multicast Groups<br>- MLD Snooping Querier<br>- MLD Packet Statistics<br>- Multicast Filtering: 256 profiles and 16 entries per profile<br>- Router Port Setting: Static Router Port/Forbidden Router Port |
| | STP | • STP(802.1d)<br>• RSTP(802.1w)<br>• MSTP(802.1s)<br>• MSTI instances: 16 | • STP Security<br>- Loop Protect<br>- Root Protect<br>- TC Protect<br>- BPDU Protect<br>- BPDU Filter |
| | LLDP (802.1ab) | • Local Info<br>• Neighbor Info | • Statistic Info<br>• LLDP-MED |
| | L2PT | | |
| | PPPoE ID Insertion | • Circuit-ID Type | • Remote-ID |
| | PoE | • PoE Power Budget (Max): 1484W<br>• Port Config<br>- PoE Status: Enabled/Disabled<br>- PoE Priority: Low/Middle/High<br>- Power Limit<br>- Time Range<br>- PoE Profile | • PoE Profile Config<br>• PoE Auto Recovery |
| | ERPS | • Ring: 16 | |
| | Virtual MAC | | |
| | Sticky MAC | | |

## Software Features[△]

| Model | | S6500-48MPP6Y | |
|---|---|---|---|
| L3 Features | IPv4 Interfaces: 256(shared with IPv6 Interfaces)<br>IPv6 Interfaces: 256(shared with IPv4 Interfaces) | | |
| | IPv4 Static Routes: 1024 (shared with IPv6 Static Routes)<br>IPv6 Static Routes: 512 (shared with IPv4 Static Routes) | | |
| | IPv4 Host Routes: 6100 (shared with IPv4 Host Routes)<br>IPv6 Host Routes: 6100 (shared with IPv6 Host Routes) | | |
| | IPv4 Network Routes: 10240 (shared with IPv6 Network Routes)<br>IPv6 Network Routes: 5120 (shared with IPv4 Network Routes) | | |
| | ECMP | • Max ECMP Routes: 256<br>• Max ECMP Nexhops per Destination: 32 | |
| | ARP | • Static ARP: 512<br>• Dynamic ARP: 7680 | |
| | ND: 7680 | | |
| | DHCP | • DHCP Server<br>- IP Pools: 64<br>- Max Leases: 8000<br>- Manual Binding Entries: 1000<br>- Exclude IP range Entries: 100 | • DHCP Relay<br>• DHCP L2 Relay<br>• DHCPv6 Relay<br>• DHCPv6 L2 Relay |
| | VRRP | • VRRP V2/V3<br>• VRRP Instance: 64<br>• VRRP Virtual IP: 32 per instance | |
| | OSPF | • OSPFv2<br>- OSPF Process: 16<br>- Graceful Restart<br>- OSPFv2 BFD | • OSPFv3<br>- OSPFv3 Instance: 1<br>- OSPFv3 BFD |
| | RIP | • RIPv1/v2 | • RIPng |
| | VRF | • VRF Instance: 1024 | |
| | IS-IS | • IS-ISv4<br>• IS-ISv6<br>• IS-IS BFD | • IS-IS Instance: 16<br>• IS-IS Graceful Restart |
| | BGP | • BGPv4 | • BGP Graceful Restart |
| | PIM | • PIM-DM (IPv4)<br>• PIM-SM (IPv4)<br>• PIM-SSM (IPv4) | • IPv4 Multicast Route entries: 1024 |
| | IGMP | • Version: v1/v2/v3 | • IGMP Groups: 2048 |
| | BFD | • Template Numbers: 16 | • Session Numbers: 8 |
| | PBR | | |
| | uRPF | | |
| QoS | Class of Service | • Priority Queues: 8 Queues<br>• Port Priority<br>• 802.1P Priority<br>• DSCP/ToS Priority | • Priority Schedule Mode: SP/WRR per Queue<br>• Queue Weight Config: For WRR/ SP+WRR Mode |
| | Bandwidth Control | • Rate Limit<br>- Ingress Rate Limit<br>- Egress Rate Limit<br>- Rate Limit Grade: 64kbps | • Storm Control<br>- Control Mode: kbps/ratio<br>- Broadcast<br>- Multicast<br>- Unknown Unicast |
| | Voice VLAN | • Supported OUI Numbers: 64 | |
| | WRED | • WRED profile: 16 | |

## Software Features[△]

| Model | | S6500-48MPP6Y | |
|---|---|---|---|
| Network Security | IP-MAC Binding | • Binding entries: 1024 entries<br>• Manual Binding | • ARP Scanning<br>• DHCP Snooping |
| | IPv6-MAC Binding | • Binding entries: 1024 entries<br>• Manual Binding | • DHCPv6 Snooping<br>• ND Snooping |
| | ARP Inspection | • ARP Detect entries: 1024 entries<br>• ARP Detect | • ARP Defend<br>• ARP Statistics |
| | ND Detection | • ND Detection entries: 1024 entries<br>• ND Detect | • ND Statistics |
| | IP Source Guard | • IP Source Guard entries<br>- Default SDM Template: 299<br>- IPv4 SDM Template: 499<br>- IPv6 SDM Template: 0 | • Security Type<br>- Source IP<br>- Source IP + Source MAC |
| | IPv6 Source Guard | • IPv6 Source Guard entries<br>- Default SDM Template: 0<br>- IPv4 SDM Template: 0<br>- IPv6 SDM Template: 249 | • Security Type<br>- Source IPv6<br>- Source IPv6 + Source MAC |
| | RA Guard: 30 entries | | |
| | DoS Defend | • Scan SYNFIN<br>• Xmascan<br>• NULL Scan | • SYN sPort less 1024<br>• Ping Flooding<br>• SYN/SYN-ACK Flooding |
| | DHCP Filter | • DHCPv4 Filter<br>- Legal Server entries: 200 | • DHCPv6 Filter<br>- Legal Server entries: 200 |
| | 802.1x | • Control Type<br>- Port Based<br>- MAC Based<br>• Auth Method: PAP/EAP-MD5/EAP-TLS/EAP-TTLS/EAP-PEAP | • Radius Authentication<br>• Radius Accounting<br>• Radius Server Load Balancing<br>• RADSEC<br>• Guest VLAN |
| | AAA | | |
| | ACL | • Time-Range<br>- Time Slice<br>- Week Time-Range<br>- Absolute Time-Range<br>- Holiday<br>• MAC ACL<br>• IP ACL<br>• Combined ACL<br>• IPv6 ACL<br>• Rule Operation<br>- Permit<br>- Deny<br>• Policy Action<br>- Mirror<br>- Rate Limit<br>- Redirect<br>- QoS Remark<br>• Binding<br>- Port Binding<br>- VLAN Binding | • Default Template<br>- IPv4 ACL Rules: 300 entries<br>- IPv6 ACL Rules: 0 entries<br>- MAC ACL Rules: 300 entries<br>- Combined ACL Rules: 300 entries<br>• IPv4 Access<br>- IPv4 ACL Rules: 0 entries<br>- IPv6 ACL Rules: 0 entries<br>- MAC ACL Rules: 300 entries<br>- Combined ACL Rules: 500 entries<br>• IPv6 Access<br>- IPv4 ACL Rules: 0 entries<br>- IPv6 ACL Rules: 250 entries<br>- MAC ACL Rules: 200 entries<br>- Combined ACL Rules: 0 entries<br>• Omada<br>- IPv4 ACL Rules: 0 entries<br>- IPv6 ACL Rules: 150 entries<br>- MAC ACL Rules: 0 entries<br>- Combined ACL Rules: 600 entries<br>• Extra<br>- IPv4 ACL Rules: 600 entries<br>- IPv6 ACL Rules: 300 entries<br>- MAC ACL Rules: 800 entries<br>- Combined ACL Rules: 600 entries |
| | MACSec (gcm-aes-128, gcm-aes-256) | | |
| | Secure boot | | |
| Virtualization | IP Tunnel | • IPv6 over IPv4<br>• IPv6 over IPv4 GRE | • IPv4 over IPv4 GRE<br>• Tunnel entries: 100 |

## Software Features[Δ]

| Model | | S6500-48MPP6Y |
|---|---|---|
| Maintenance | System Monitor | • CPU Monitor<br>• Memory Monitor |
| | sFlow | |
| | OAM | • EFM<br>- Link Monitoring<br>- Remote Failure Indication Config<br>- Statistics |
| | DLDP | |
| | SNMP | • SNMP Version: v1/v2c/v3<br>• SNMP Config<br>- Global Config<br>- SNMP View<br>- SNMP Group<br>- SNMP User<br>- SNMP Community<br>• Notification<br>- Trap: IPv4/IPv6<br>- Inform: IPv4/IPv6<br>• RMON v1/v2<br>• Public MIBs<br>• Private MIBs |
| | MIBs | • MIB II (RFC1213)<br>• Interface MIB (RFC2233)<br>• Ethernet Interface MIB (RFC1643)<br>• Bridge MIB (RFC1493)<br>• P/Q-Bridge MIB (RFC2674)<br>• RMON MIB (RFC2819)<br>• RMON2 MIB (RFC2021)<br>• RADIUS Accounting Client MIB (RFC2620)<br>• RADIUS Authentication Client MIB (RFC2618)<br>• Remote Ping, Traceroute MIB (RFC2925)<br>• Support TP-Link Private MIB |
| | NETCONF | |
| | IEEE802.3az Energy Efficient Ethernet (EEE) | |
| | DHCP Auto Install | |
| | Log | • Display/Filtering<br>• Severity Level<br>• Save to Flash<br>• Remote Host<br>• Backup Log |
| | Device Diagnostics | • Cable Test |
| | Network Diagnostics | • Ping<br>• IPv6 Ping<br>• Tracert<br>• IPv6 Tracert |
| Others | Index | |
| | Show running config | • Use the show running config command to view device's running status via telnet.<br>• Configuration File: Import/Export/Edit |
| Omada SDN Controller | Omada Pro SDN controller | |

# Ordering Information

| Host Switch | |
|---|---|
| Model | Description |
| S6500-48MPP6Y | Omada Pro 48-Port 2.5G Stackable L3 Managed PoE++ Switch with 6 25G Slots |

| Power Supply Module | |
|---|---|
| Model | Description |
| PSM500-AC | 500 W AC Power Supply Module |
| PSM900-AC | 900 W AC Power Supply Module |

| SFP/SFP+/SFP28 Module | |
|---|---|
| Model | Description |
| SM311LS | Gigabit SFP module, Single-mode, LC interface, Up to 20km distance |
| SM311LM | Gigabit SFP module, Multi-mode, LC interface, Up to 550m distance |
| SM321A | Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1550 nm/RX: 1310 nm, 20 km |
| SM321A-2 | Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1550 nm/RX: 1310 nm, 2 km |
| SM321B | Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1310 nm/RX: 1550 nm, 20 km |
| SM321B-2 | Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1310 nm/RX: 1550 nm, 2 km |
| SM5110-LR | 10GBase-LR SFP+ LC Transceiver, single-mode, LC connector, 1310nm, 10 km |
| SM5110-SR | 10GBase-SR SFP+ LC Transceiver, multi-mode, LC connector, 850nm, 300 m |
| SM6110-SR | 25GBase-SR SFP28 LC Transceiver, MMF (Multimode fiber), LC connector, 850 nm, 100 m |
| SM6110-LR | 25GBase-LR SFP28 LC Transceiver, SMF (Single-mode fiber), LC connector, 1310 nm, 10 km |

| Direct Attach Cable | |
|---|---|
| Model | Description |
| SM6220-1M | 1 Meter 25G SFP28 Direct Attach Cable |
| SM5220-1M | 1 Meter 10G SFP+ Direct Attach Cable |
| SM5220-3M | 3 Meter 10G SFP+ Direct Attach Cable |

| RJ45 SFP/SFP+ Modules | |
|---|---|
| Model | Description |
| SM331T | 1000BASE-T RJ45 SFP Module |
| SM5310-T | 10GBASE-T RJ45 SFP+ Module |

| MC Series Media Converter | |
|---|---|
| Model | Description |
| MC210CS | Gigabit Single-Mode Media Converter, up to 20 km, chassis mountable |
| MC200CM | Gigabit multi-mode SC SFP Transceiver, up to 550 m, chassis mountable |
| MC200L | Gigabit SFP slot supporting mini-GBIC modules, chassis mountable |
| MC1400 | 14-slot power supply chassis for TP-LINK MC Series Media Converter, 19-inch rack-mountable |

†These functions require the use of the Omada Pro SDN Controller. Zero-Touch Provisioning requires the use of the Omada Pro Cloud-Based Controller.

[Δ]Some features are available only after upgrading to the latest software version.

Some models featured in this guide may be unavailable in your country or region. Visit TP-Link website for local sales information: www.tp-link.com.

Specifications are subject to change without notice. All the brands and product names are trademarks or registered trademarks of their respective holders. © 2025 TP-Link