


Installation Steps

1. Press down on the front panel switch to remove the front panel

2. Remove both top and bottom panels

3. Remove the 2.5" SSD tray, and gently flex the tray to facilitate the installation of the 2.5" SSD






RM600 & RM61-312

User manual
www.silverstonetek.com

Accessories Content

		
Motherboard Standoff	Motherboard / 5.25" Device Screw	PSU Screw
		
5.25" Guide Rail Screws	5.25" Ventilation Bezel	5.25" Bezel
		
5.25" Guide Rail x9 Key	Case Feet	
		
Vertical position accessories	2U Redundant accessories	Fan Extension Cable
		
3.5" HDD	2.5" SSD	

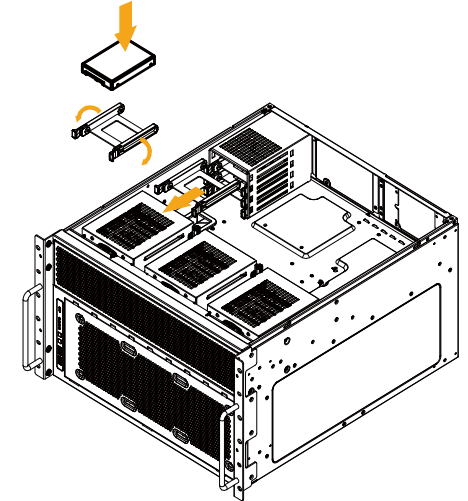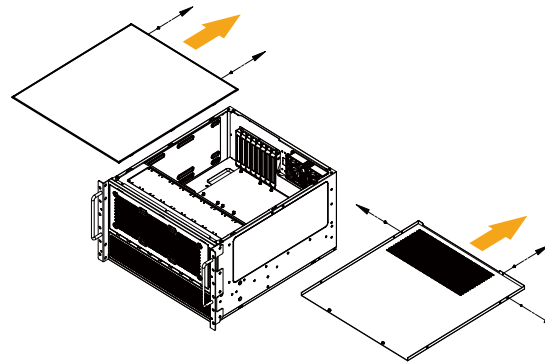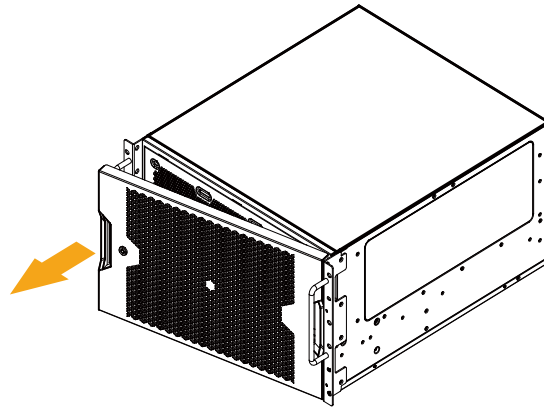


4. Install the 3.5" HDD in a similar manner. The 3.5" HDD can be inserted into the hard drive cage in either direction

5. External 2.5"/3.5" drive installation


6. To facilitate a simple connection of the hard drive backplane cables, remove the fan bracket by loosening the screws that secure the backplane to the chassis

RM600

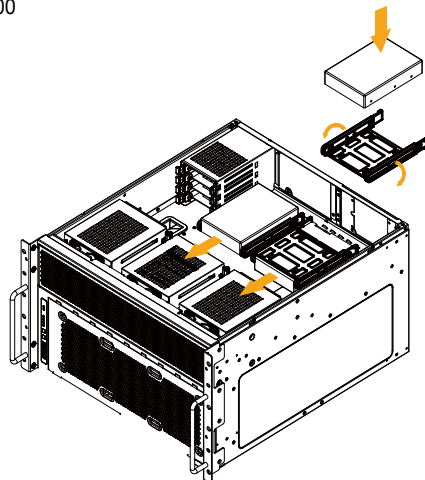


RM61-312

1. Pull the tray out of the chassis
2. Install the drive into the drive tray, secure it with screws, and then re-insert the assembled drive tray module back into the chassis

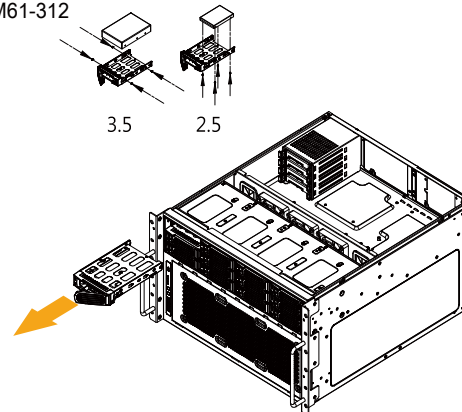


RM61-312

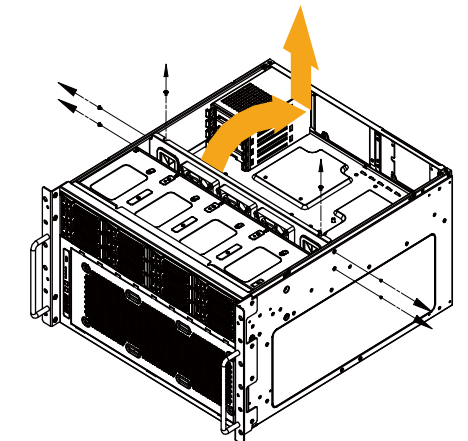


7. Installation of ATX / Mini Redundant / 2U Redundant PSUs


1. If installing dual ATX PSUs, please remove the ventilation cover beforehand

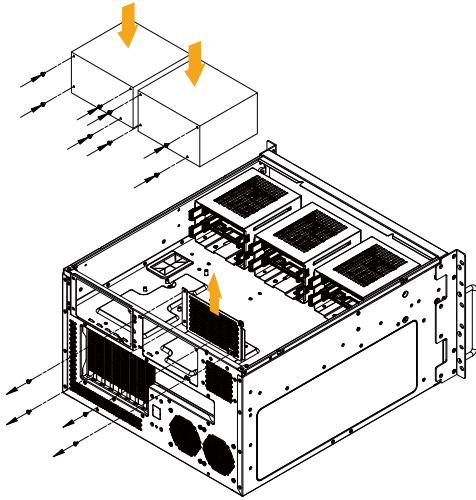

2. If installing a Mini Redundant PSU, please remove the ATX PSU bracket first

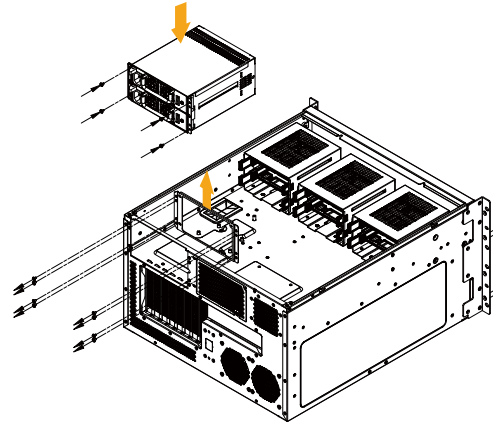


3. If installing a 2U Redundant PSU, also ensure to remove the ATX PSU bracket first

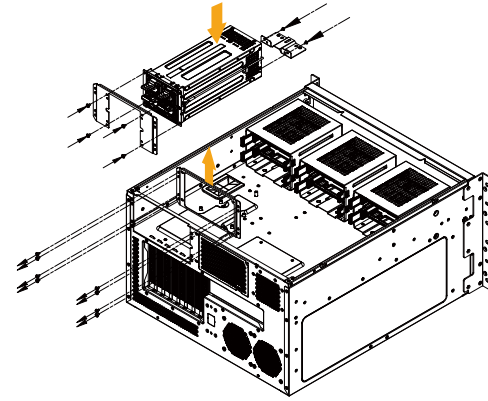


8.5.25" ODD installation


1. Remove the front 360mm radiator bracket

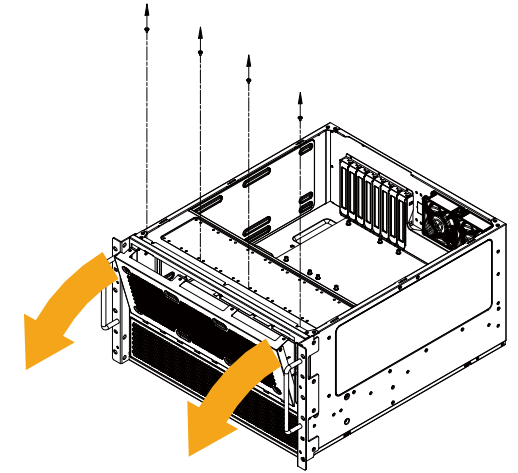

2. Attach the 5.25 guide rail to the 5.25" device, then slide the device in and secure it with guide rail screws

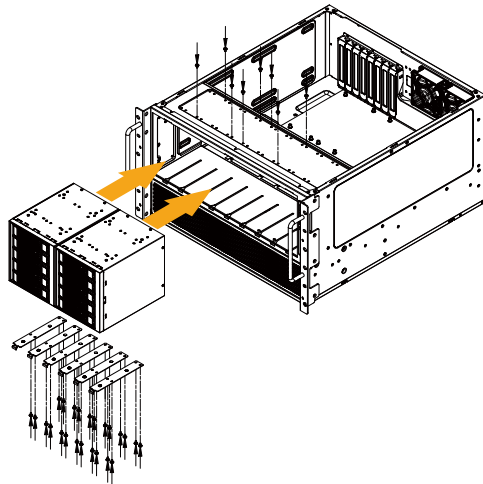


3. Install the 5.25" bezel, if 5.25" device mounts are unallocated, you can replace the 5.25" bezel with 5.25" ventilation panel to increase intake airflow

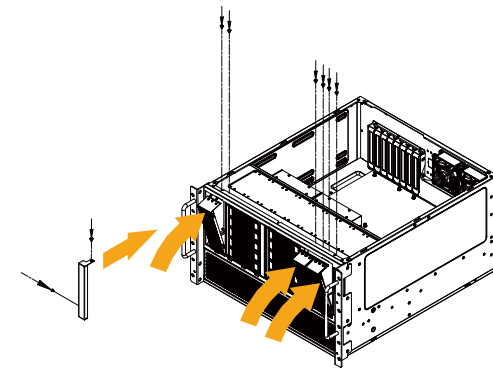


9. Vertical orientation installation

1. Remove L-shaped brackets and handle bar on both sides

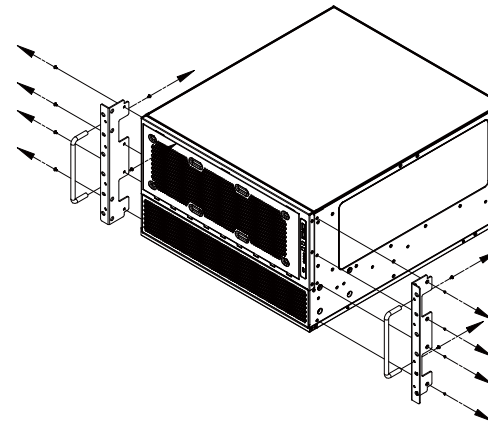


2. Install handle bar onto the flat bracket and case feet

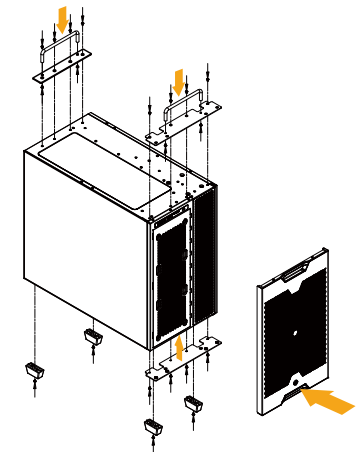

Optional Installation


1. Optional 3.5" HDD cooling fan assembly

RM600

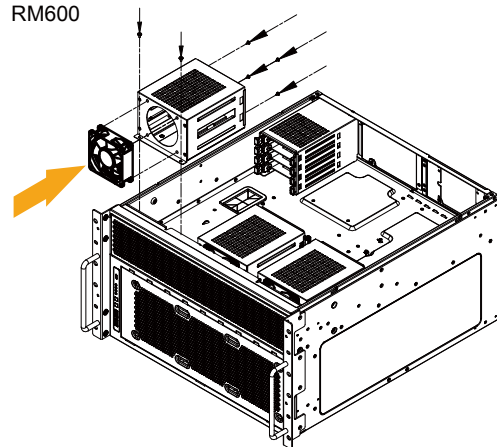


Component Limitations

1. CPU cooler height limitation with expansion card retainer is 132mm, and 150mm without

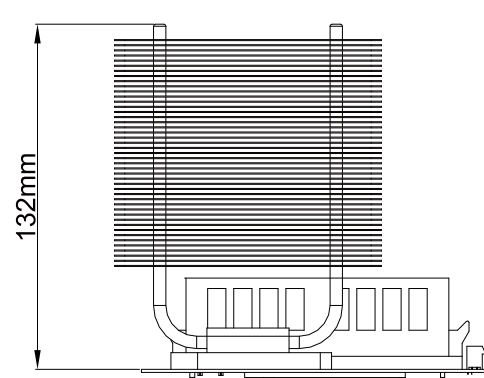


2. The radiators on both sides of the chassis will each occupy one 5.25" slot, as illustrated. The allowable total thickness of the radiators plus fan is depicted in the figure


The combined length of 5.25" devices and motherboard equals to 481mm, the length of 5.25" devices allowed by various motherboard form factor is as shown.

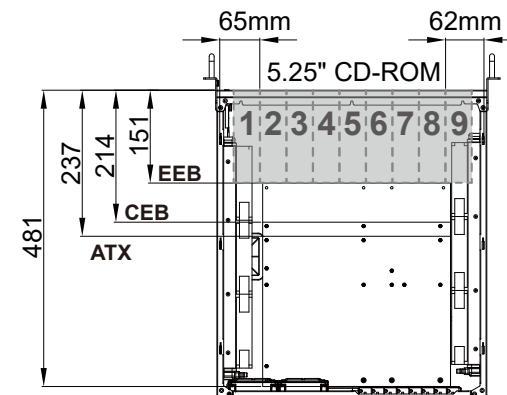


3. The maximum length allowed for the graphics card is 341mm. When combined with the 5.25" device, the total length extends to 483mm

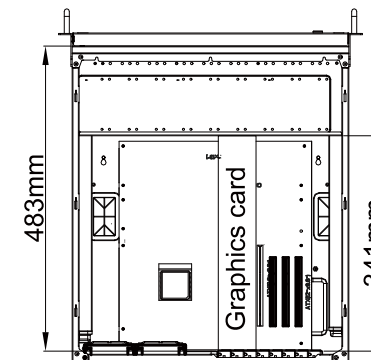

4. The PSU has a maximum depth limitation of 294mm The maximum depth limitation for the PSU in RM61-312 is 277mm.

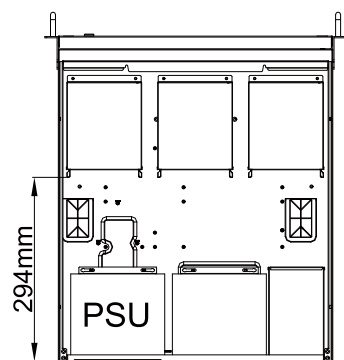

RM600

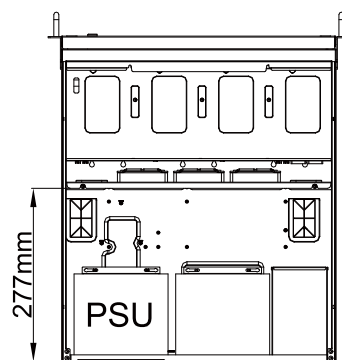

RM61-312

Warranty Information

This product has a limited 1 year warranty in North America and Australia.
For information on warranty periods in other regions, please contact your reseller or SilverStone authorized distributor.
本产品自购买之日起，享有有限保修（不含运费），整机一年有限保修（部分产品为二年、三年或五年），详细保修条款请参考官方网页 <http://www.silverstonetek.com.cn/> 公布之产品型号与保修。

Warranty terms & conditions

- Product component defects or damages resulted from defective production is covered under warranty. Defects or damages with the following conditions will be fixed or replaced under SilverStone Technology's jurisdiction:
 - Usage in accordance with instructions provided in this manual, with no misuse, overuse, or other inappropriate actions.
 - Damages not caused by natural disaster (thunder, fire, earthquake, flood, salt, wind, insect, animals, etc.)
 - Product is not disassembled, modified, or fixed. Components not disassembled or replaced.
 - Warranty mark/labels are not removed or broken.
- Loss or damages resulted from conditions other than ones listed above are not covered under warranty.
- Under warranty, SilverStone Technology's maximum liability is limited to the current market value for the product (depreciated value, excluding shipping, handling, and other fees). SilverStone Technology is not responsible for other damages or loss associated with the use of product.
- Under warranty, SilverStone Technology is obligated to repair or replace its defective products. Under no circumstances will SilverStone Technology be liable for damages in connection with the sale, purchase, or use including but not limited to loss of data, loss of business, loss of profits, loss of use of the product or incidental or consequential damage whether or not foreseeable and whether or not based on breach of warranty, contract or negligence, even if SilverStone Technology has been advised of the possibility of such damages.
- Warranty covers only the original purchaser through authorized SilverStone distributors and resellers and is not transferable to a second hand purchaser.
- You must provide sales receipt or invoice with clear indication of purchase date to determine warranty eligibility.

If a problem develops during the warranty period, please contact your retailer/reseller/SilverStone authorized distributors or SilverStone <http://www.silverstonetek.com>.
Please note that: (i) You must provide proof of original purchase of the product by a dated limited receipt; (ii) You shall bear the cost of shipping (or otherwise transporting) the product back to you after completing the warranty service; (iii) Before you send the product, you must be issued a Return Merchandise Authorization ("RMA") number from SilverStone. Updated warranty information will be posted on SilverStone's official website.
Please visit <http://www.silverstonetek.com> for the latest updates.

Additional info & contacts

For North America (support@silverstonetek.com)

SilverStone Technology in North America may repair or replace defective product with refurbished product that is not new but has been functionally tested.
Replacement product will be warranted for remainder of the warranty period or thirty days, whichever is longer. All products should be sent back to the place of purchase if it is within 30 days of purchase, after 30 days, customers need to initiate RMA procedure with SilverStone Technology in USA by first downloading the "USA RMA form for end-users".

Form from the below link and follow its instructions: <http://www.silverstonetek.com/contactus.php>
For Australia only (support@silverstonetek.com)

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Please refer to above "Warranty terms & conditions" for further warranty details.

SilverStone Technology Co., Ltd. 12F No. 168 Jiansong Rd., Zhonghe Dist., New Taipei City 225 Taiwan R.O.C. + 886-2-8228-1238 (standard international call charges apply)

For Europe (support@silverstonetek.de)

For China (support@silverstonetek.com.cn)

For all other regions (support@silverstonetek.com)

零件名称	铝 (AL)	铁 (FE)	铜 (CU)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
机壳 (金属)	○	○	○	○	○	○
风扇	○	○	○	○	○	○
线材	○	○	○	○	○	○
螺丝	○	○	○	○	○	○
包材	○	○	○	○	○	○

▲最高浓度限制：1134ppm(按重量)

○：表示含有有害物质在该部件所有均质材料中的含量均在GB/T 26577 规定的限量要求以下。

×：表示该有害物质在该部件所有均质材料中的含量超出GB/T 26577 规定的限量要求。



SilverStone Technology Co., Ltd.

www.silverstonetek.com

support@silverstonetek.com

G11250690