



MKE 400 Compact Shotgun Microphone



Highly directional on-camera microphone with built-in wind protection and shock absorption for enhanced in-camera audio. Integrated headphone monitoring output with volume control, 3-step gain sensitivity switch and switchable low-cut filter. Includes carrying pouch, furry windshield, and 3.5 mm TRS and TRRS coiled cables for compatibility with DSLR/M cameras or mobile devices.

FEATURES

- Highly directional, super-cardioid shotgun microphone for isolated and enhanced in-camera audio
- Integrated wind protection and internal suspension mount to minimize handling noise
- Built-in low-cut filter and 3-step sensitivity switch for added flexibility and control
- Integrated headphone output jack with volume adjustment for audio monitoring
- Interchangeable 3.5 mm TRS and TRRS connectivity for DSLR/M cameras or mobile devices

ARTICLE INFORMATION

MKE 400

Art. no. 508898

DELIVERY INCLUDES

- MKE 400 on-camera microphone
- CL 35 TRS, locking TRS to TRS coiled cable
- CL 35 TRRS, locking TRS to TRRS coiled cable
- MZH 400 furry windshield
- Drawstring pouch
- Quick guide
- Safety guide






MKE 400

Compact Shotgun Microphone

POLAR PATTERN

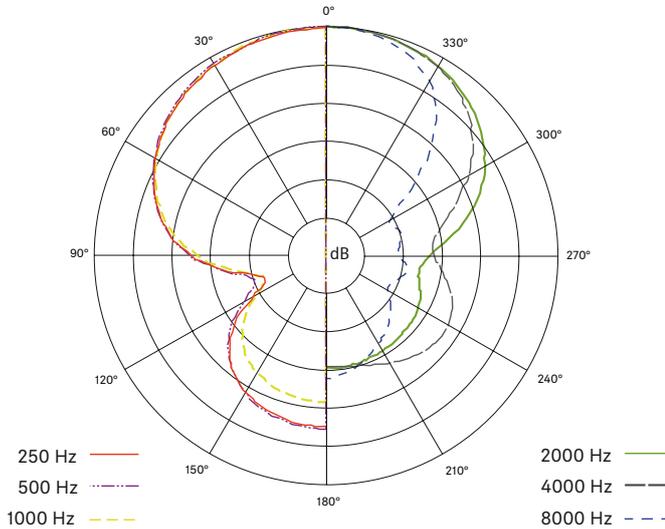

SPECIFICATIONS

Microphone

Transducer principle	pre-polarized condenser
Frequency response	50 – 20,000 Hz
Pick-up pattern	super cardioid
Sensitivity at 1 kHz	-23 / -42 / -63 dBV/Pa
Max SPL at 1 kHz	132 dB SPL
Power supply	battery (2x AAA / LR03 size, 1.5 V)
Auto power function	plug-in power required (2 - 10 V)
Operating time	> 100 h*
Low battery indicator	> 3 h of remaining operating time
Microphone output	3.5 mm jack, screwable
Dimensions	126 x 67 x 37 mm
Weight	93.5 g

* less when headphone is connected

Headphone output

Headphone output	3.5 mm jack
Min. headphone impedance	16 Ω
Output power at 1 kHz	105 mW (headphone impedance 16 Ω) 70 mW (headphone impedance 32 Ω)
Total harmonic distortion	< 1 % at 50 mW
Digital volume control	8 steps of 6 dB

FREQUENCY RESPONSE

