




**PS series** is a group of well optimized design of the latest generation, strong polypropylene material box of professional speakers, with the characteristics of full functions, light weight, high SPL, clear, bright and balanced sound quality , exquisite appearance and so on. All adopt high quality unit configuration, the box molded by injection mold.

## FEATURES

- Strong polypropylene box, injection molding
- High quality unit configuration
- Digital amplifier with DSP, multiple preset modes can be selected or stored
- Multiple hanging points and support, easy to use

## APPLICATIONS

- Conference rooms
- Multi-function halls
- Entertainment venues,
- Mobile Performances

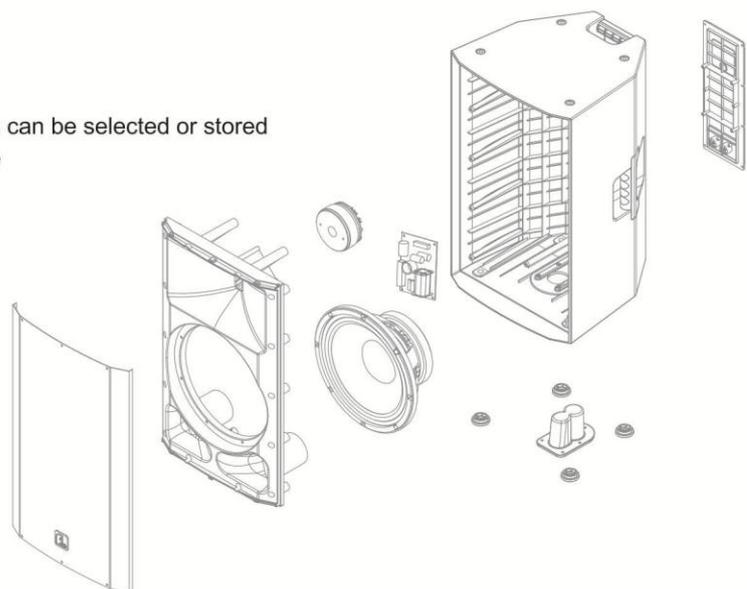



pro audio

# PS series Engineering Plastic Speaker

Two-way Full-range Loudspeaker System




MODEL	PS110	PS110A	PS112	PS112A	PS115	PS115A
FREQUENCY RESPONSE(-3dB)	70Hz-18kHz	70Hz-18kHz	65Hz-18kHz	65Hz-18kHz	65Hz-18kHz	65Hz-18kHz
FREQUENCY RESPONSE(-10dB)	65Hz-20kHz	65Hz-20kHz	60Hz-20kHz	60Hz-20kHz	55Hz-20kHz	55Hz-20kHz
LF DRIVER	1×10"	1×10"	1×12"	1×12"	1×15"	1×15"
	2" voice coil	2" voice coil	2.5" voice coil	2.5" voice coil	2.5"voice coil	2.5"voice coil
HF DRIVER	1×1"	1×1"	1×1"	1×1"	1×1"	1×1"
	1"voice coil	1"voice coil	1.4"voice coil	1.4"voice coil	1.4"voice coil	1.4"voice coil
RATED POWER	150W RMS	400W/8Ω	250W RMS	400W/8Ω	300W RMS	400W/8Ω
	600W peak	+100W/8Ω	1000W peak	+100W/8Ω	1200W peak	+100W/8Ω
SENSITIVITY(1watt/1meter)	93dB	--	97dB 1	--	98dB	--
MAXIMUM SPL	115dB continuous	115dB continuous	120 dB continuous	120 dB continuous	122dB continuous	122dB continuous
	121dB peak	121dB peak	126dB peak	126dB peak	128dB peak	128dB peak
IMPEDANCE	8 ohms	--	8 ohms	--	8 ohms	--
DISPERSION(-6dB)	90°×60°	90°×60°	90°×60°	90°×60°	90°×60°	90°×60°
CROSSOVER FREQUENCIES	2.6 kHz	--	1.9kHz	--	2.2kHz	--
INPUT CONNECTORS	2×Speakon NL4	XLR	2×Speakon NL4	XLR	2×Speakon NL4	XLR
PACKAGE SIZE	360×348×598mm	360×348×598mm	450×450×685mm	450×450×685mm	500×500×771mm	500×500×771mm
NET WEIGHT	12 kg /pc	14 kg /pc	18 kg/pc	20 kg/pc	21 kg/pc	23 kg/pc
GROSS WEIGHT	14 kg/pc	16 kg/pc	21 kg/pc	23 kg/pc	25 kg/pc	27 kg/pc



**PS110/PS110A**



**PS112/PS112A**

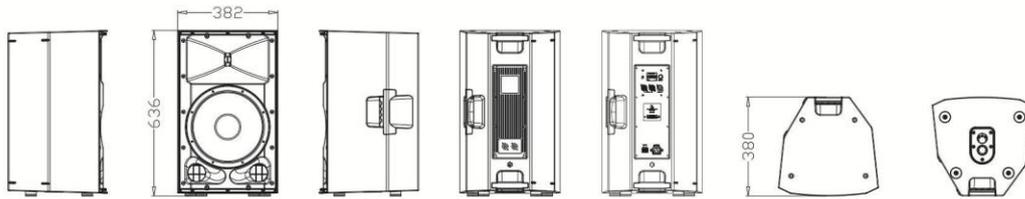


**PS115/PS115A**

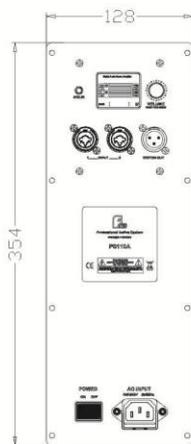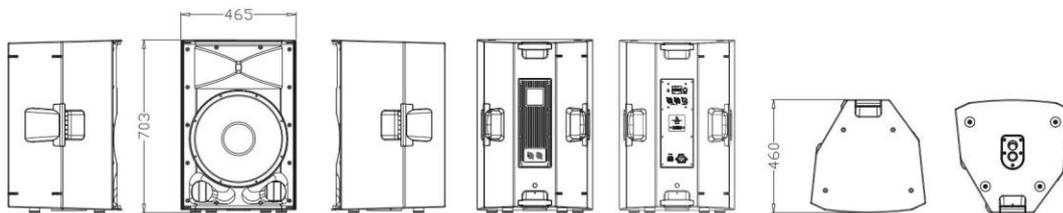

**PS110A**



**PS112A**

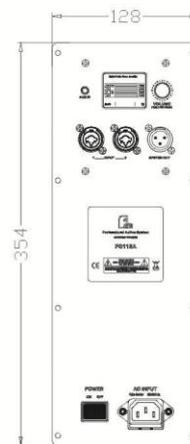

**PS115A**